

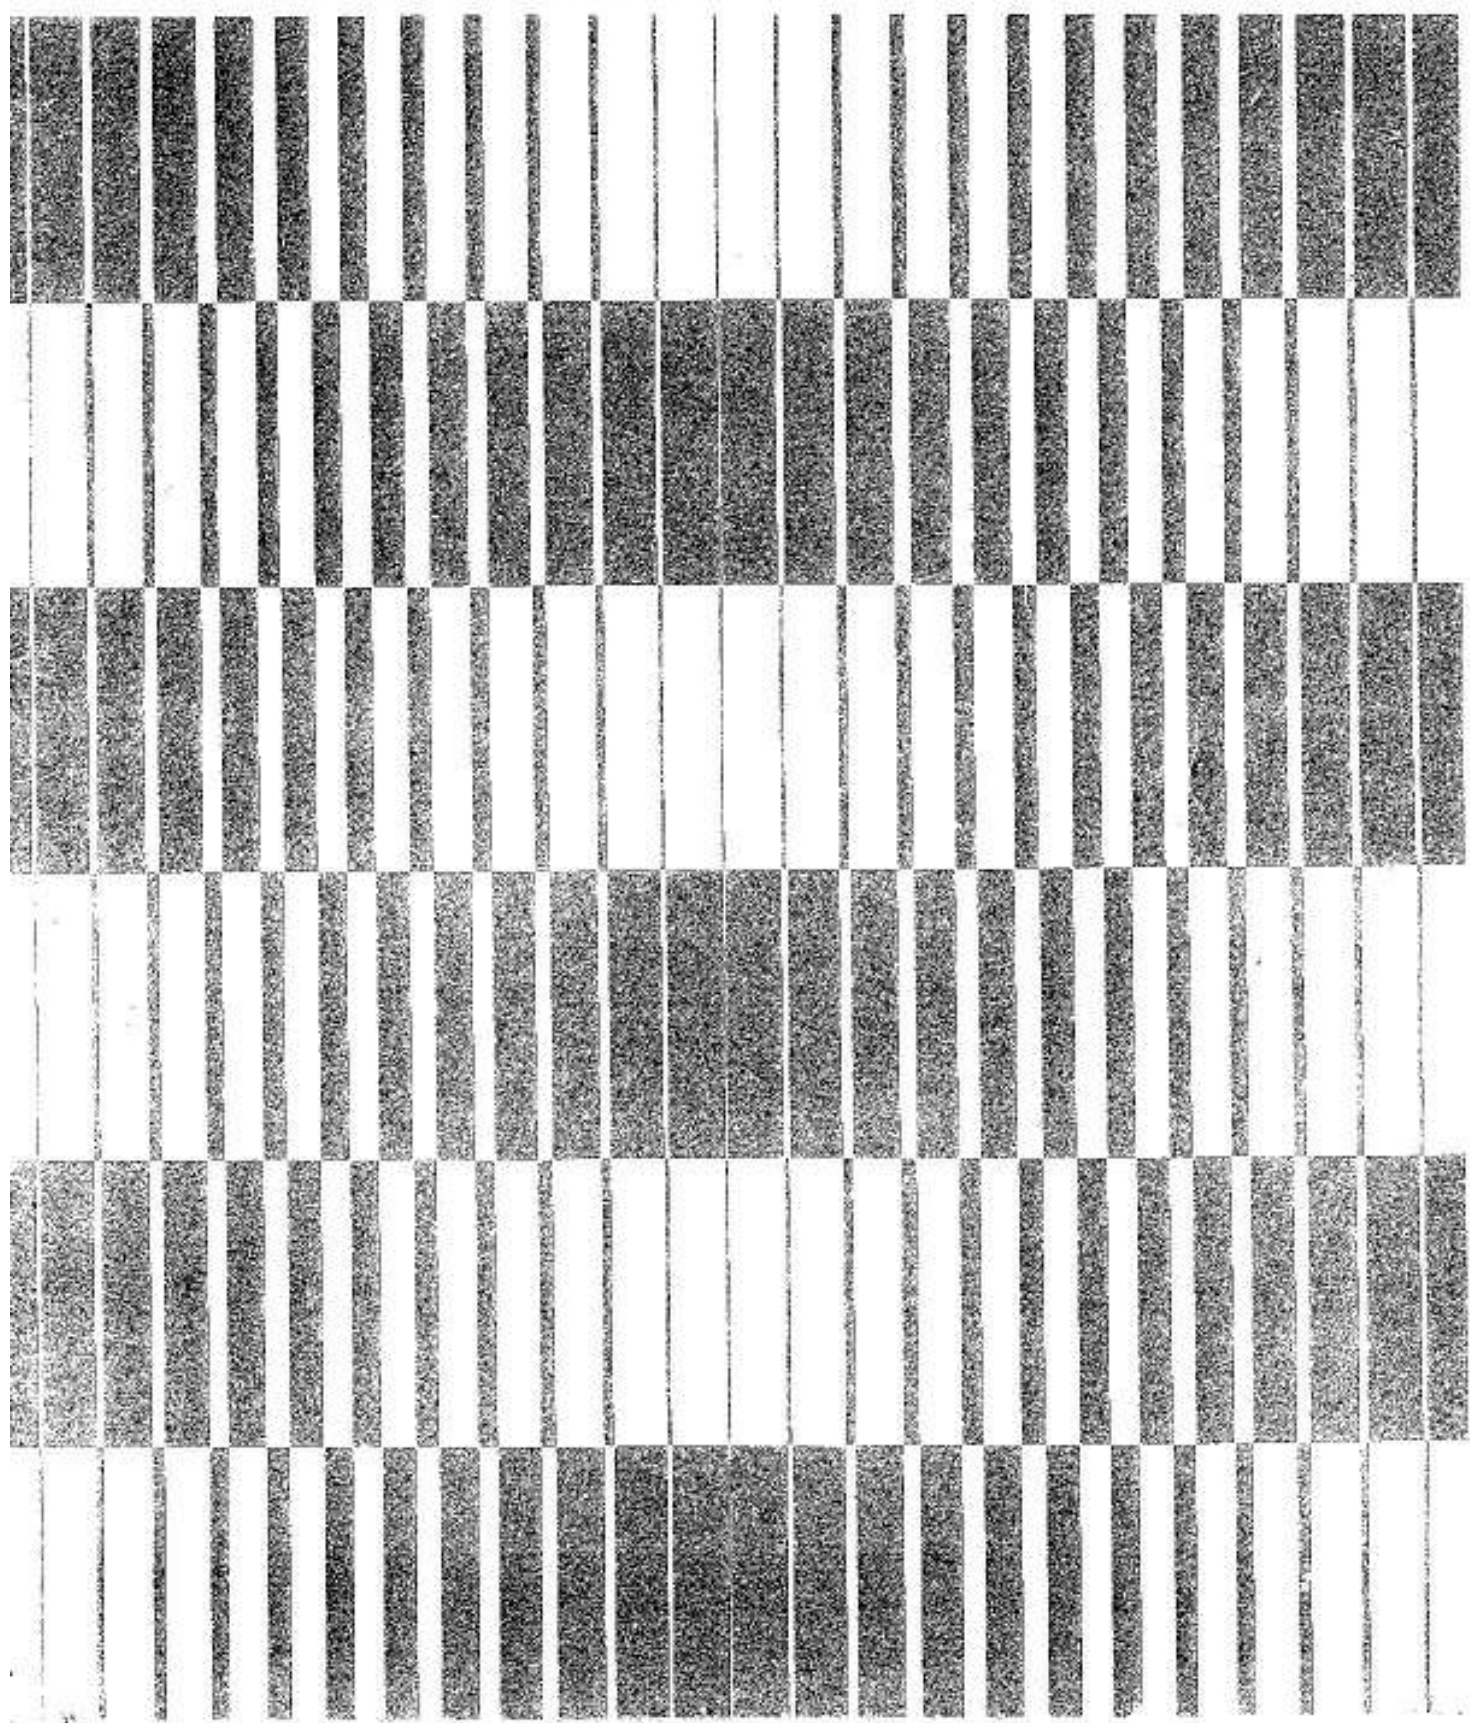


# Instruction manual for ribbing attachment Model KR-830

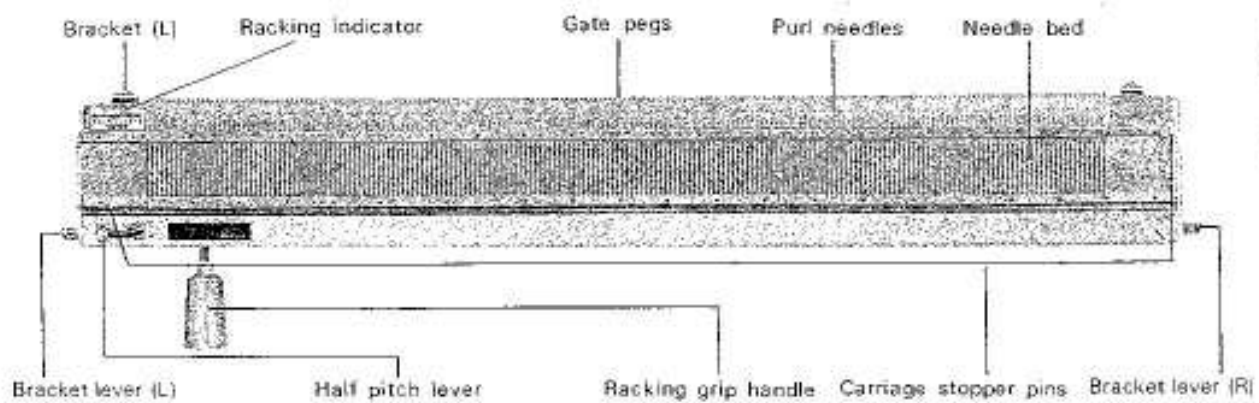

# Name of parts

1

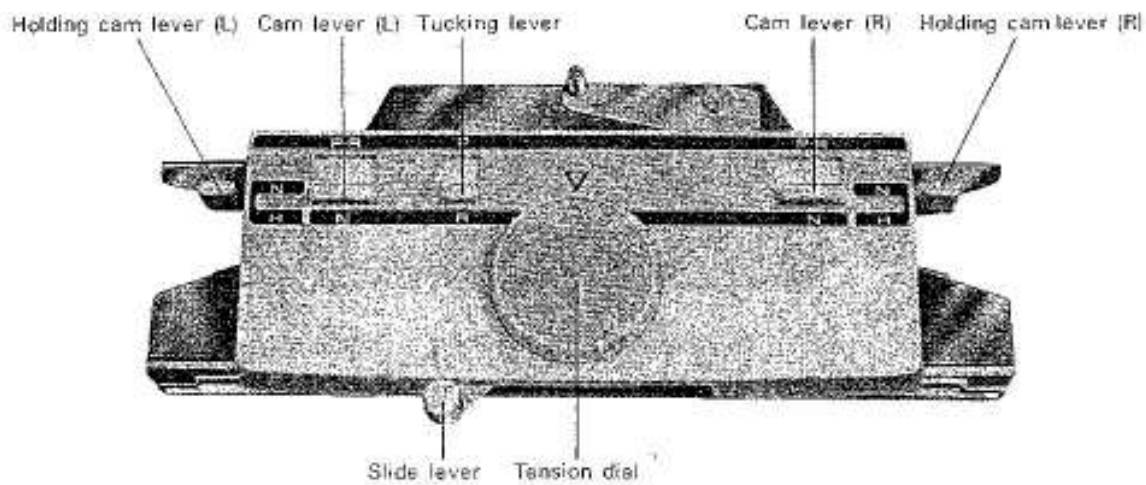

# Accessories

2



Connecting arm assembly



End stitch presser plate, R & L



Table clamps



Cast on comb, long (200 stitches)  
short (130 stitches)

Fine knitting bar



Large weights



Small weights



Wire-loop type weight hangers



Claw type weight hangers



Spinner



Work hook




Spare needles



Case



Transfer needle




$\frac{3}{8} \times \frac{3}{8}$  needle pusher


# Setting up your ribber to the knitter

3

1. Secure the knitter onto a flat table using the Table clamps provided as an accessory for the ribber.

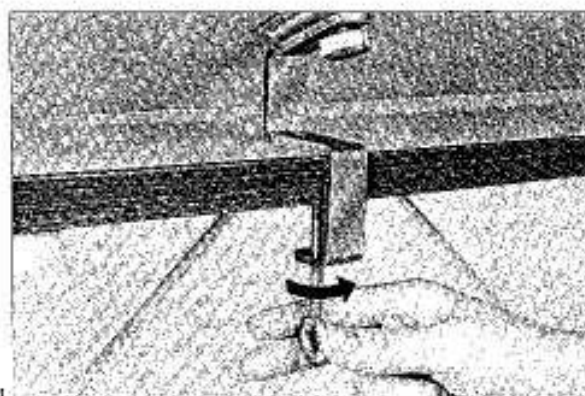


2. Remove the thumb screws from the brackets on both sides of the ribber.

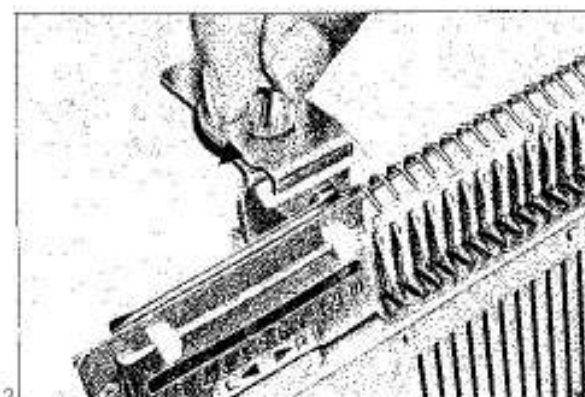


3. Insert the Grip shaft into the Racking grip shaft holder, and turning the grip handle, push it in until you hear the "click".

\* After setting the grip handle, please check the working of the racking grip handle by turning it.

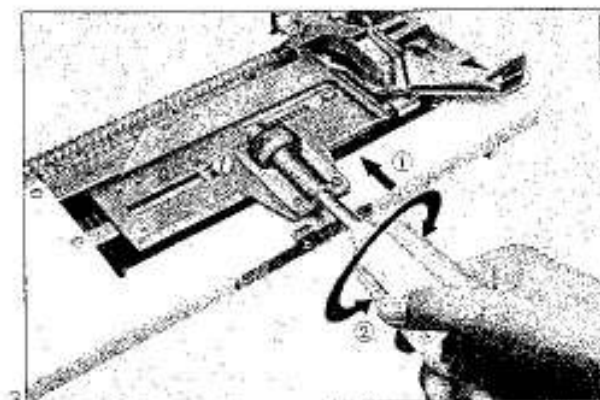


4. Holding the ribber with both hands so that the gate pegs of the ribber are up and the purl needle butts are toward you.

Insert the lower lip of right bracket beneath the knitter bed as far as it will go, then insert the left bracket.

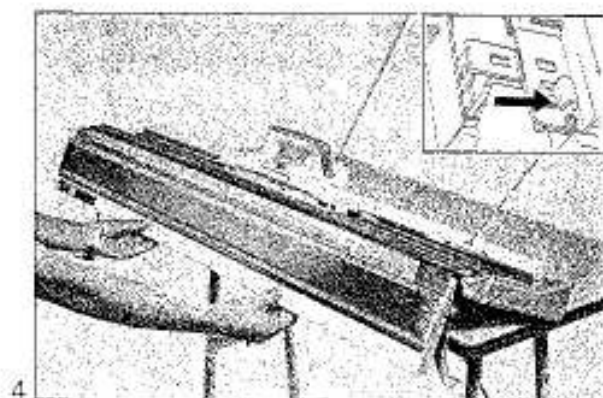


5. Using the Spanner, put the thumb screws to both brackets of the ribber.

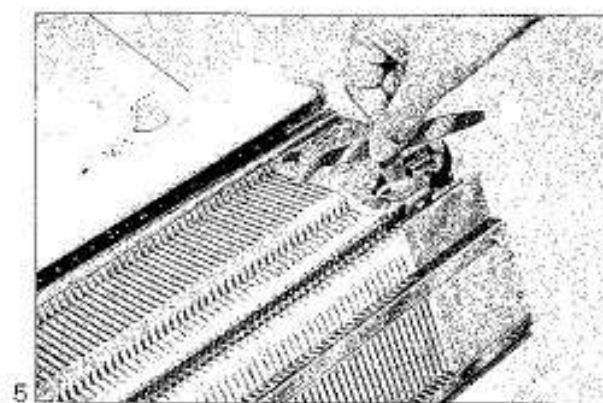


6. Place the rear foot of the KR carriage into left end of the rear rail of the needle bed, and keeping off the front foot from the front rail, move the KR carriage to right as shown in the photograph.

✱The KR carriage is packed in an accessories box.

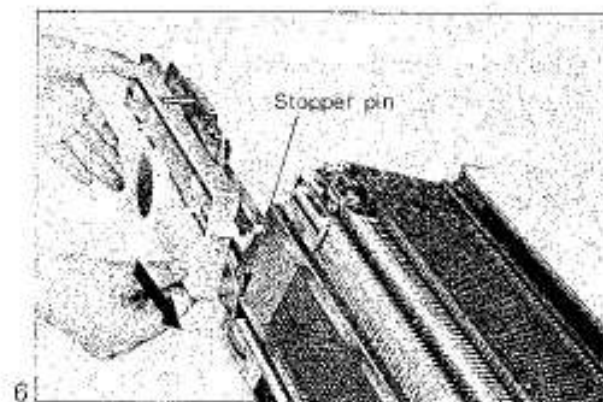





7. Set the front foot of the KR carriage to the front rail of the needle bed. Please check whether the KR carriage moves on the needle bed smoothly.

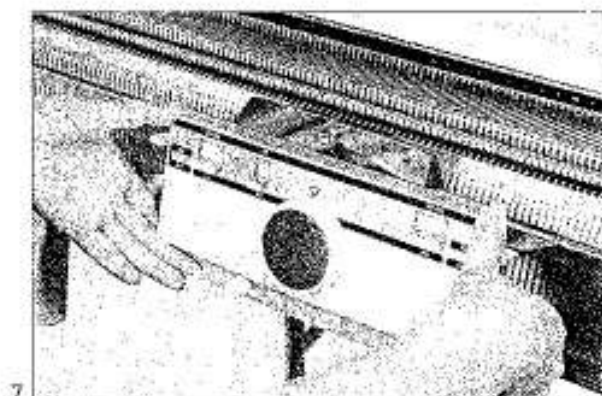


8. Loosen both Thumb screws of KH carriage and fit the Connecting arm securely. Then fasten the screws.

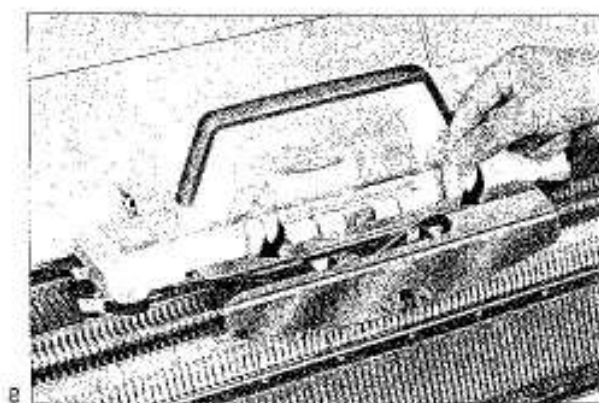

9. Move the KH carriage toward the KR carriage slowly so that both carriages connect with the connecting arm automatically.

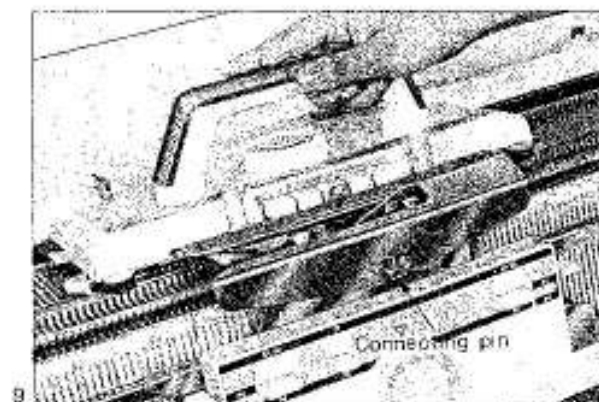


10. Lower the reinforcing arm of bracket, and place the flat part of arm on the table.

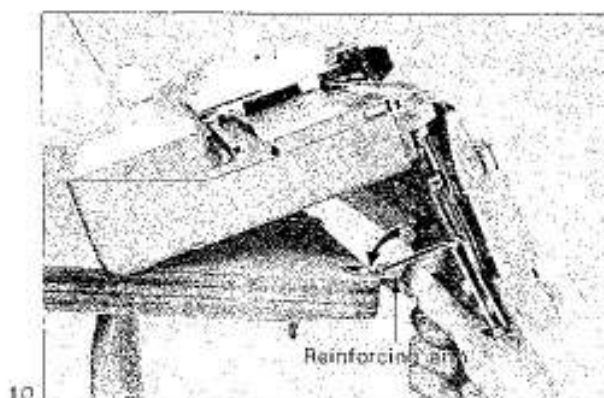

10


11. Using the clamps of KH, fasten the arm to the table.

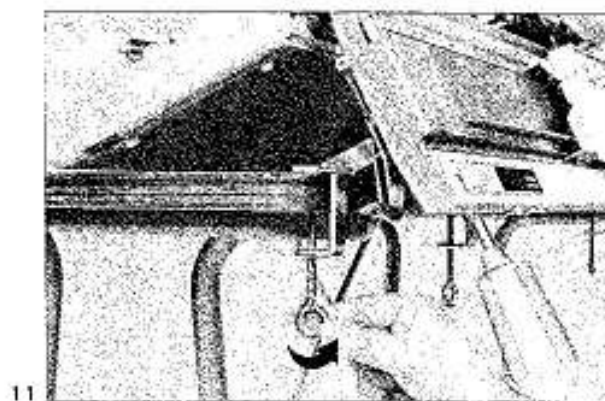

11


12. Set up the Yarn tension unit.

- \* In case of the combination of KH-820/ KR-830, use the yarn tension unit of KH-820 without any changes.
- \* In case the knitter is KH-830, change the angle of the yarn tension unit as follows :
  - a. Take off the head of Yarn tension unit and put it to the rod reversely.

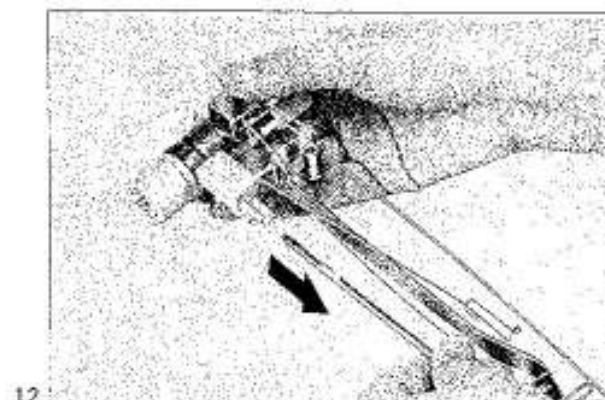


12

- b. Turn back the "Take-up springs" as far as they will go.

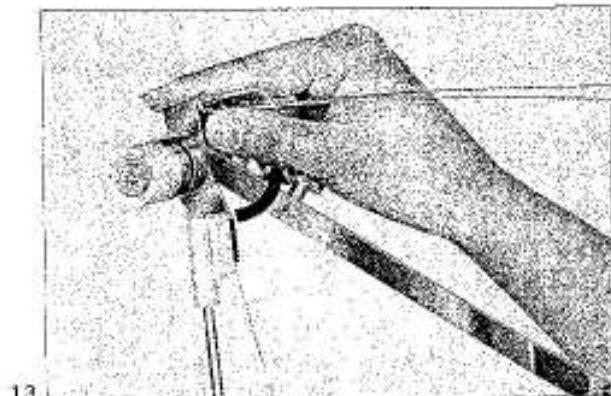


13

- c. Turn the Rear yarn guide opposite to the side on which the Rear yarn guide is set when you use the knitter without attaching the ribber.

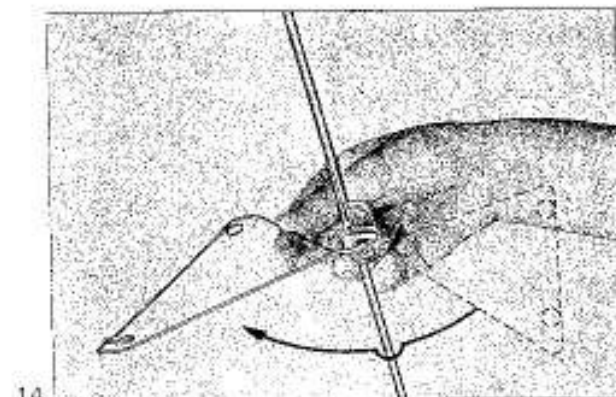


14

- d. Insert the end of the rod into the stand hole at the center of the machine.

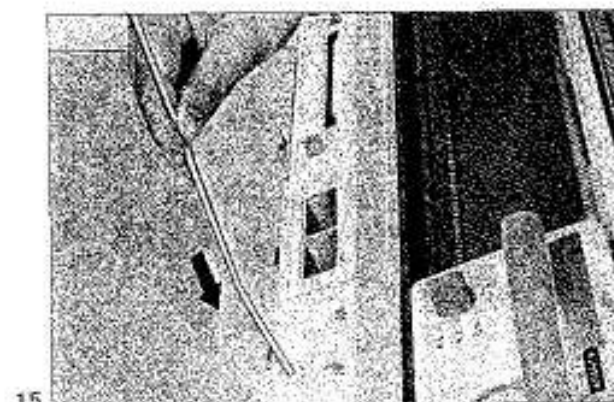

15

13. Now you have finished setting up the ribber to the knitter.

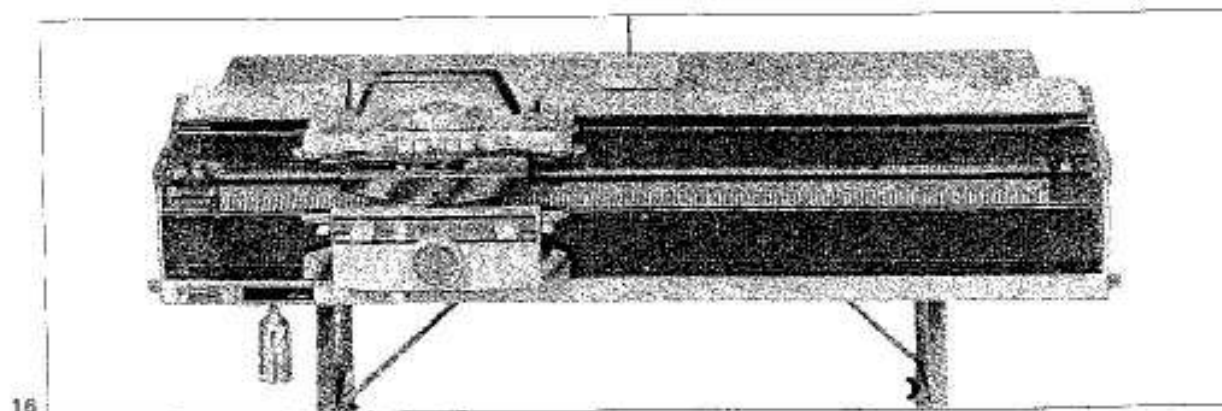

16



# Here are a few important points to remember before you start knitting


8

## TENSION DIAL

The tension in knitting denotes the size of the stitch. The tension dial on the KR carriage is graduated from "0" to "8", each space between numbers being subdivided into three parts. The figure "0" denotes the tightest tension, i.e. the smallest stitch and the "8" denotes the loosest or largest stitch.

The tension at which a garment is knitted depends not only on personal taste, but also on the type of garment required and the thickness of the wool.

The following tension chart is a guide for your reference.

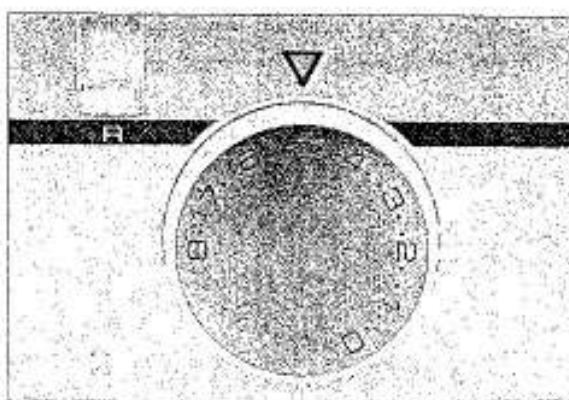

17

## STANDARD TENSION CHART (A) FOR THE COMBINATION OF KH-830/KR-830

Yarn	Slide lever	Pattern			
		1×1 Rib	2×2 Rib	Full needle	Circular
Fine (ex.2ply)	I				3 ~ 4
	II				
Medium(ex.3ply)	I	0 ~ 1	0 ~ 2	1 ~ 3	4 ~ 5
	II	2 ~ 3	3 ~ 4	3 ~ 5	
Medium(ex.4ply)	I	1 ~ 3	2 ~ 4	3 ~ 5	5 ~ 6
	II	3 ~ 4	4 ~ 5	4 ~ 6	6 ~ 7
Bulky (ex.5ply)	I	Use the Bracket spacers			6 ~ 8
		5 ~ 8	5 ~ 8		

18

STANDARD TENSION CHART (B) FOR THE COMBINATION OF KH-820/KR-830


Yarn	Slide lever	Pattern			
		1×1 Rib	2×2 Rib	Full needle	Circular
Fine (ex.2ply)	I				3 - 4
	II	0 - 1	0 ~ 2	1 - 2	3 - 4
Medium(ex.3ply)	I	0 ~ 1	1 - 3	1 ~ 2	4 ~ 5
	II	3 - 5	3 - 5	2 ~ 4	4 ~ 5
Medium(ex.4ply)	I	0 ~ 2	2 ~ 4	2 - 4	5 - 6
	II	3 ~ 5	3 - 6	3 ~ 5	6 ~ 7
Bulky (ex.5ply)	I	5 - 8	5 ~ 8		6 - 8

19

**SLIDE LEVER**

The slide lever has two positions, I and II. If a firm automatic cast-on edge is required on ply up to 4 ply, use Slide lever position II. Position I is for thicker ply.

Elasticity and firmness of fabric is also determined by Slide lever position. Position I is for a softer result and position II for a firm one.

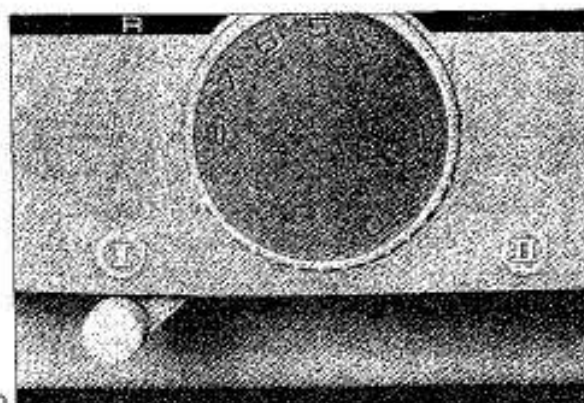

20

## NEEDLE POSITION

There are 4 positions on the needle bed of the ribber.

Position A : Resting or non-knitting position.  
(against the base of the needle grooves.)

Position B : Knitting or working position.

Position D : When the needles are brought in this position from the position E, they will automatically back to the position B by operation of the carriage.

Position E : Holding or partial knitting position.

## HALF PITCH LEVER

Half pitch lever is on the left end below the needle bed. Two positions of the Half pitch lever are shown on the indicating plate as P and H.


Position P : Plain needles and purl needles directly opposite to each other.

Position H : Purl needles are halfway between two plain needles.

## RACKING GRIP HANDLE

Racking grip handle is used for making the "Racking patterns" and "Zigzag patterns". The racking position is indicated on the racking indicator. By turning the Grip handle, ribber bed is moved right or left. Normally, set the indicator to No. 5 which shows centre position.


The two cursors on the indicator plate are used as an index of the racking range. The arrow head indicates the direction of racking movement.

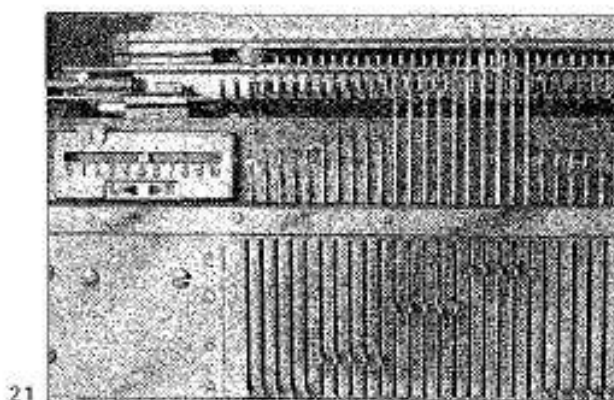


21




22

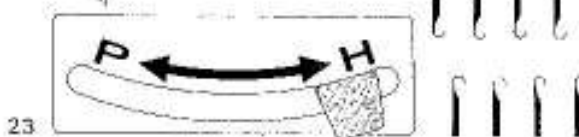

23

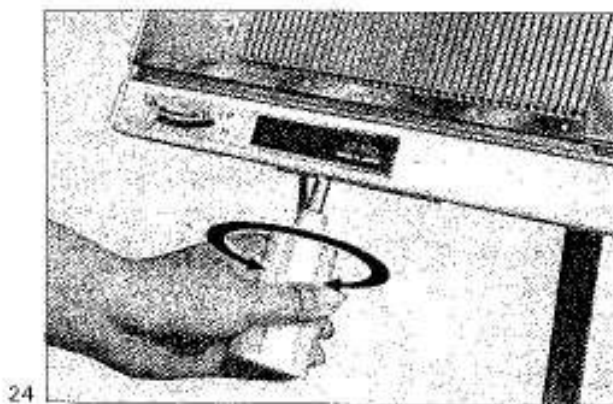

24

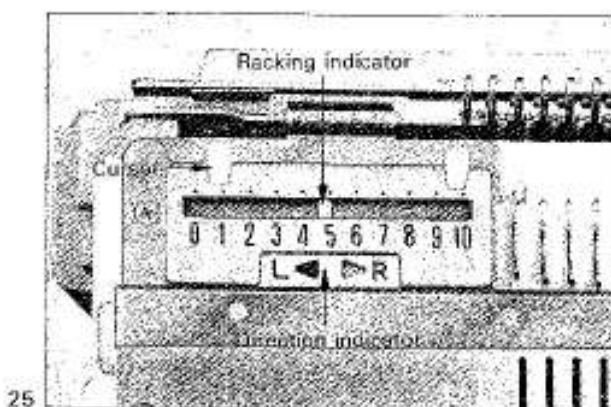

25

## BRACKET LEVER AND SLIGHT ADJUSTING LEVER

The Bracket levers and Slight adjusting levers are set at both ends of the KR needle bed. These two levers are used for letting down the ribber.

1. When you knit the thicker yarn (more than 5 ply), set the Slight adjusting levers to the Bracket levers. Then push down the Bracket levers so as to get the thicker yarn knitting position. (The ribber will come down a little.)
2. Press down the Slight adjusting levers to separate two levers (Fig. 27). And push down the Bracket levers (Fig. 28), the ribber will come down one step. This position (middle) is used for picking up dropped stitches.
3. Push down the Bracket levers again and the ribber will come down one more step. At this position (lowest) the ribber is at rest and single bed knitting can be done without removing the ribber.

To return to working position, push up the ribber with both hands as high as it will go until it stays still without holding.


## BRACKET SPACER

In case of knitting the thicker yarn (more than 5 ply) with combination of KH-830/KR-830, use the Bracket spacers to keep the clearance between each needle bed.


Raise the Bracket spacer on the Bracket, and insert the Bracket into the knitter. (See photograph 29)

Place the Bracket spacer between the Bracket stopper plate and front edge of the needle bed. Then fasten the thumb screw.


You do not have to use the Bracket spacer for the combination of KH-820/KR-830.

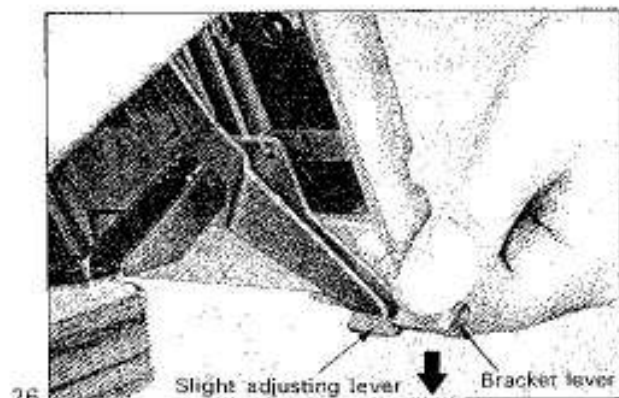


26

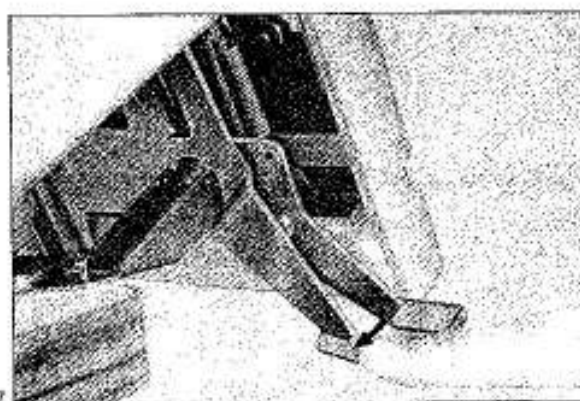

27

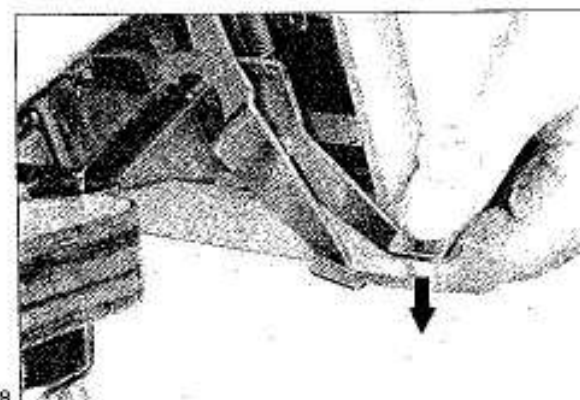


28

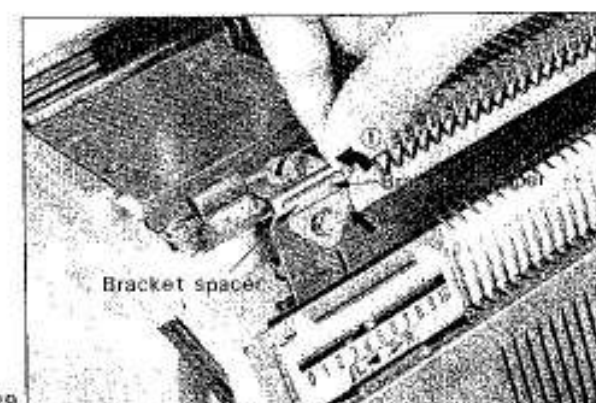

29

### DISCONNECTING THE CARRIAGE


Push down the Connecting pin and slide the KH carriage (or KR carriage) to disconnect from KR carriage (KH carriage).

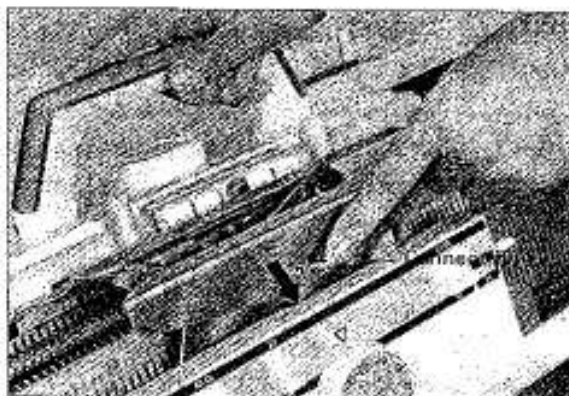

30

### TAKING OFF THE CONNECTING ARM

Loosen the thumb screws and pull the Connecting arm towards you by lifting arm up slightly.

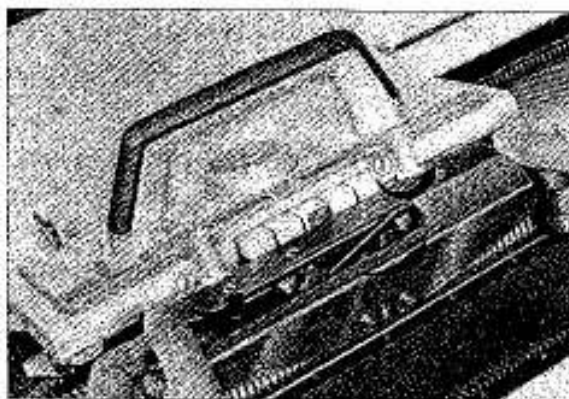


31

### TAKING OFF THE KR CARRIAGE

After disconnecting the KR carriage from the KH carriage, move the KR carriage to left end of the needle bed by keeping off the front foot from the needle bed as shown in the photograph.

IF THE CARRIAGE SHOULD JAM DURING KNITTING, PLEASE REFER TO PAGE 43 TO RELEASE IT.

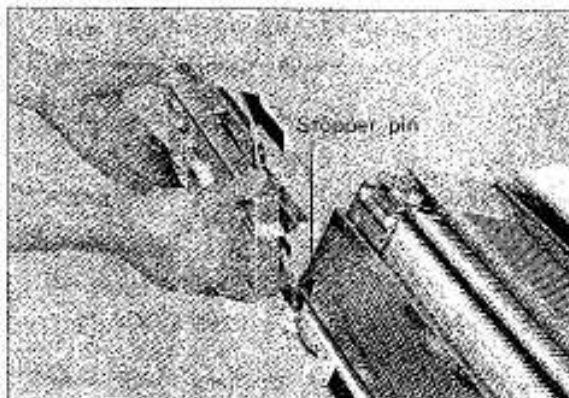

32



# How to use the accessories

13


## 1. Cast-on comb

Cast-on comb is used for casting-on the first stitches which is the selvage of the knitting. Choose long or small comb depending on the knitting width.


\*Also you can use the Short cast-on comb as a weight hanger, as detailed below:—

1. Hold the Short cast-on comb with points facing you. Lift the presser bar up, then pass the knitting work between the presser bar and comb from back side.
2. Pull the end of knitting work down ①, and turn the cast-on comb ② as shown in the Fig. 33 so that the cast-on comb may buckle on the knitting work. Then hang the weights on the cast-on comb.
3. When you reset the cast-on comb, simply pull the knitting work up so that the cast-on comb may go up. Then pull the knitting work down to lock up.


33

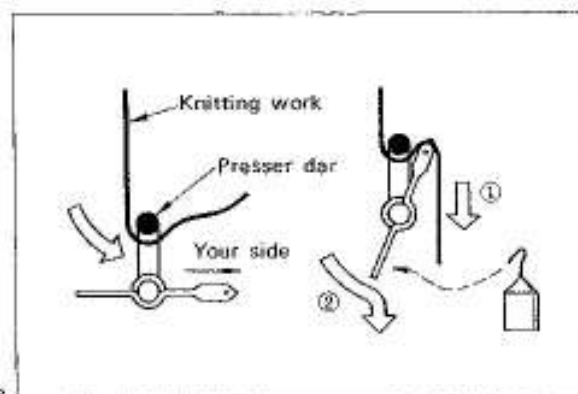

34

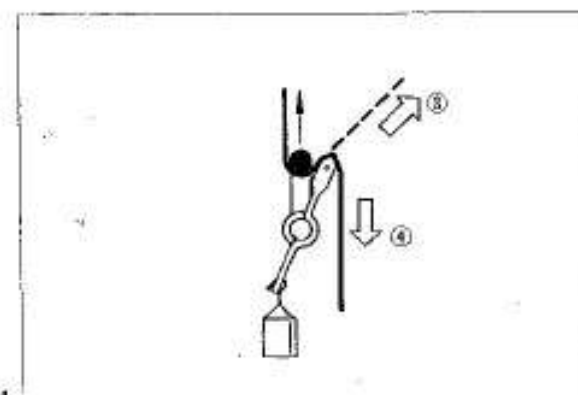

35

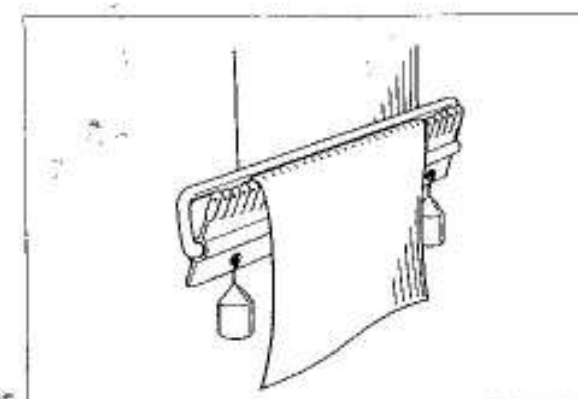

## 2. Weights

Number of weights to be used depends on the width of knitting and pattern. Hang the weights on the cast-on comb so that they hold the knitting work in balance.

Standard weights chart

No. of stitches	Large weight	Small weight
~ 50	1	—
50 ~ 100	2	—
100 ~ 150	3	2
150 ~ 200	4	2

36

### 3. Wire-loop type weight hangers

The wire-loop type weight hangers are used for hanging small weights to give tension to the edges of the knitting work and also used as a small cast-on comb for casting-on work of less than 20 stitches.

### 4. Work hook

The hook is used for picking up dropped stitches.

### 5. Claw-type weight hangers

The claw type weight hangers are used for hanging the small weights to give tension to the edge of the knitting work.

### 6. End stitch presser plate

The end stitch presser plates are used for making the stitches at the edges securely.


Put the end stitch presser plates on both ends of the KH needle gate pegs. And slide to inside until the presser plates cover the edge of knitting work.

It is recommendable to use the claw weights for the edge together with the presser plates.


### 7. Fine knitting bar

The fine knitting bar is used only for knitting the thinner yarn at the tension number 0~2.


Insert the bar from the end of the KH needle bed as shown in the photograph and illustration.

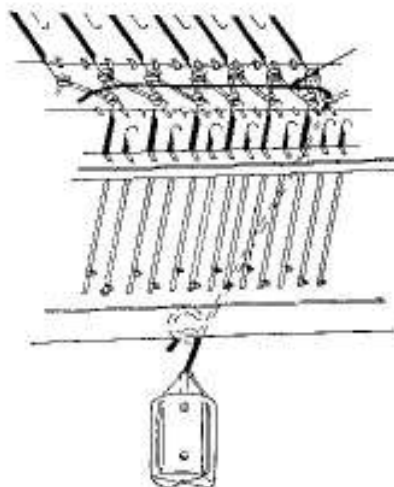

37

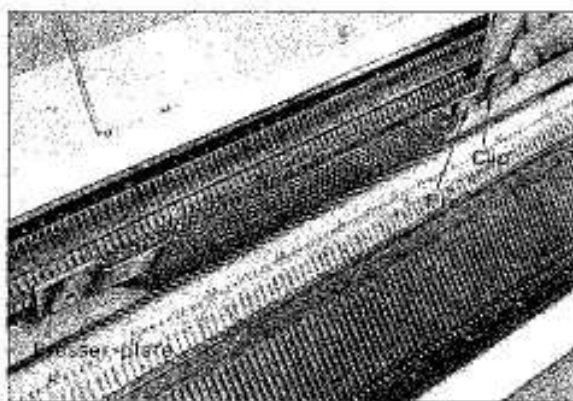

38

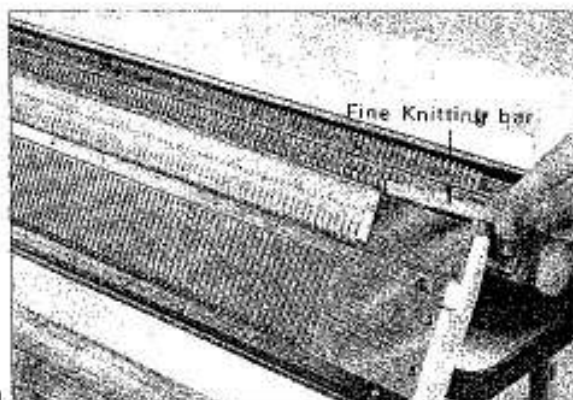

39



40


# How to Knit 1 × 1 rib

15

1 × 1 rib is most widely used for waist bands in sweaters, cuffs, collars, pockets and for many other decorative purposes.

The rib is produced by having knit stitch over knit stitch and purl stitch over purl stitch, in vertical lines, and is soft and elastic. In the following example, medium thickness wool is used for the practice.

41

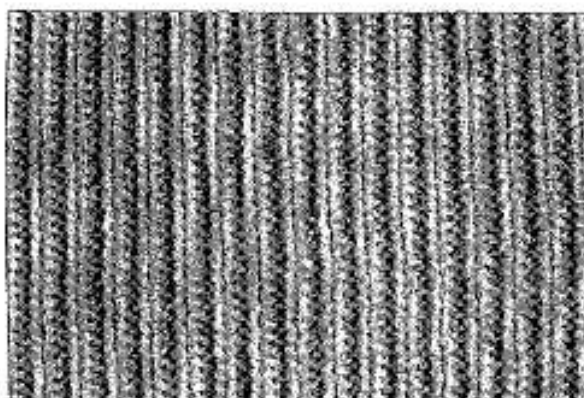

## CASTING-ON FOR 1 × 1 RIB


### 1. Setting of carriage

#### Carriage (KH)

Change knob : NL  
Tension dial : O  
Holding cam lever : N  
Pattern selector button : PLAIN

#### Carriage (KR)


Slide lever : II  
Tension dial : O  
Cam lever : (L) N, (R) N  
Tucking lever : R  
Holding cam lever : (L) N, (R) N

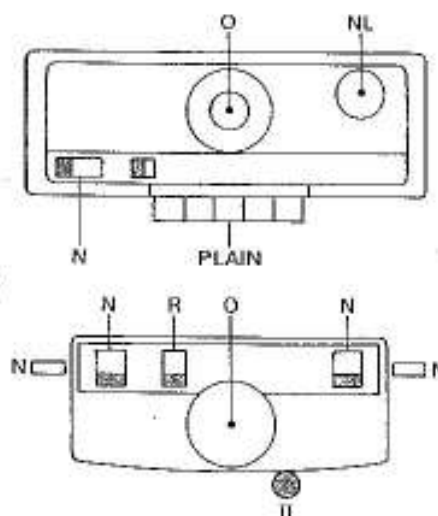

42


### 2. Needle arrangement

- Set the half pitch lever on "P".
- By using 1/1 needle pusher, arrange the plain needles and purl needles in position B of each bed. (See fig. 44.)  
Note: Both end needles must be plain needles.



43


- By operating the connected carriage a few times over all arranged needles, the needles on KH and KR needle beds will be set in a line on position B.
- Place the connected carriage at right end of the needle beds.



44


### 3. First row knitting

- a. Thread the yarn into the Yarn tension unit, and hold the end of yarn as shown in the Fig. 45.

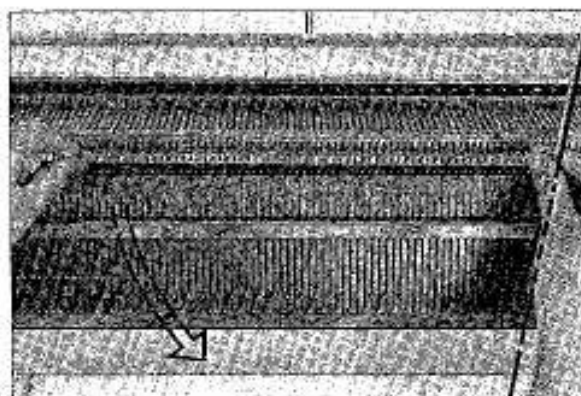


45

- b. Pass the yarn between both gate pegs, and catch the end of yarn with left hand.

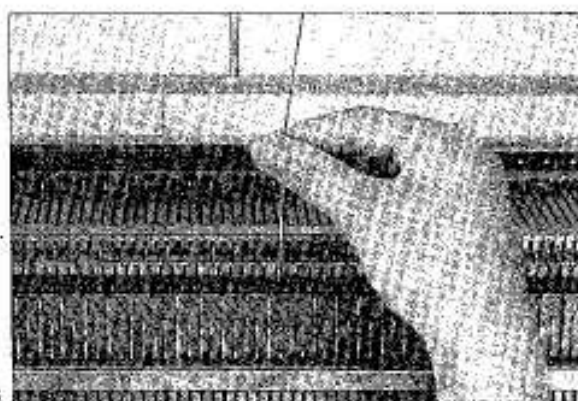


46

- c. Hold the yarn with right hand (continue to hold the end of yarn with left hand), pass to the yarn feeder, (see Fig. 47.)

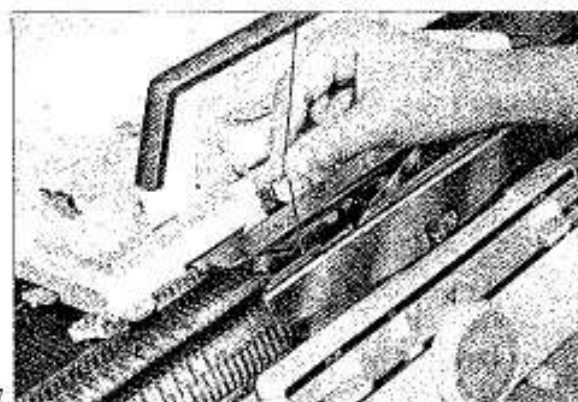

47

- d. Pass the yarn into the yarn feeder securely.

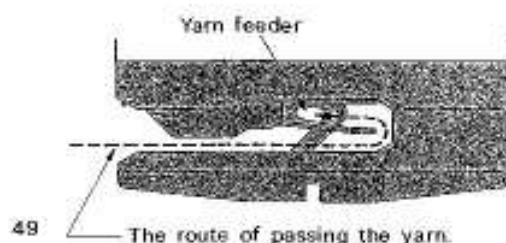


49




48

- e. Continue to hold the end of yarn with left hand, and move the connected carriage from right to left.  
(The yarn will hang on plain and purl needles.)

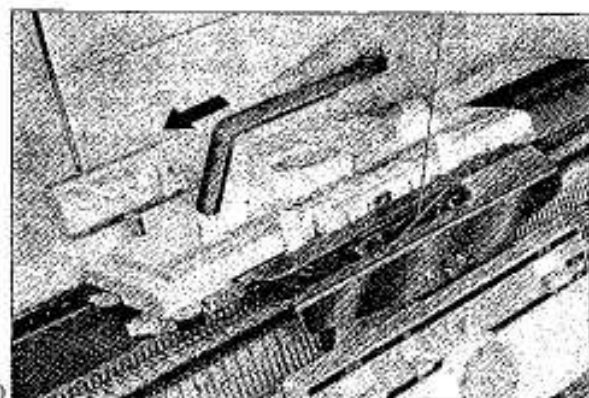

50




51

#### 4. Hang on the cast-on comb

- a. Pull out the wire from the cast-on comb.  
(Choose long or short one depending on the knitting width.)

Hold the cast-on comb with the face having the protrusions facing you and the teeth on top.


- b. Put the cast-on comb between the knitter and the ribber from underneath and insert the teeth between the plain and purl needles in such a way that the top of the comb does not disturb or drop the yarn hanging on the needles. Pass the wire through the teeth with your right hand. While holding the comb with your left hand.
- c. Hook the loose end of the yarn around the yarn clip to keep it out of the way and to tense the first stitch.

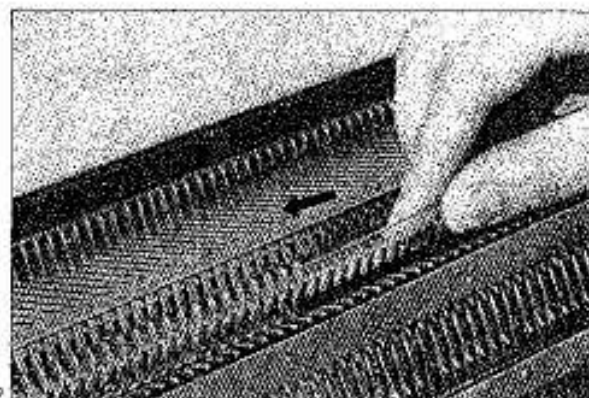

52



53

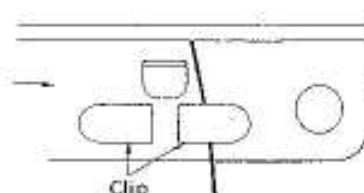

54


#### 5. Hang on the weights

Hang the weights as per Standard weights chart on page 13 on the cast-on comb to keep balance.




## 6. Perfect selvedge

- Set the carriages as shown in the Fig. 55.
- Move the connected carriage from left to right. (Only the plain needles knit.)

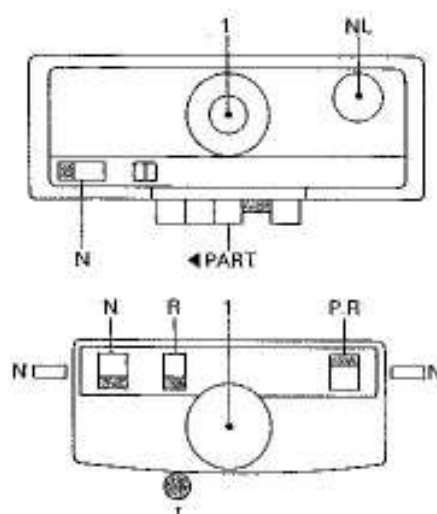


55

- Move the connected carriage from right to left. (The purl needles knit.)



56

- Move the connected carriage from left to right. (The plain needles knit.)  
The perfect selvedge has completed.



57

**1 × 1 RIB KNITTING**

- \* After knitting the selvedge, set the carriages as shown in the Fig. 59.  
Then, continue the knitting.


58

Note: Don't take the carriage back until you hear the "click" or the carriage passes the last working needle.

**YOU ARE NOW ABLE TO DO A  
FINISHED END CAST-ON.  
THIS METHOD IS VERY IMPORTANT.  
THEREFORE PLEASE PRACTICE  
THIS CAST-ON TWO OR THREE TIMES.**

**IF THE CARRIAGE SHOULD JAM  
WHILE KNITTING, PLEASE REFER TO  
PAGE 43 TO RELEASE IT.**

59

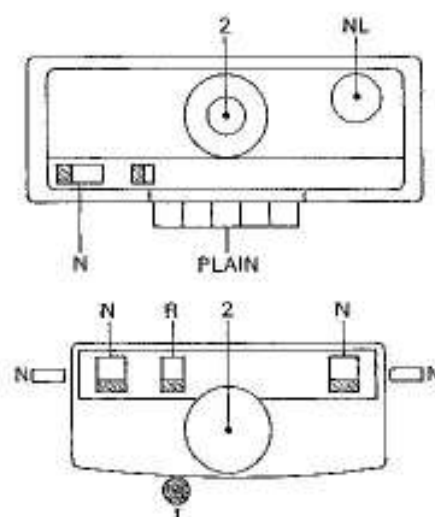


# How to knit 2 × 2 rib

19

2 × 2 rib is 2 knit and 2 purl rib.

In one row, 2 knit stitches alternate with 2 purl stitches and vertically form knit stitch over knit stitch and purl stitch over purl stitch.

In the following example, medium thickness wool is used.

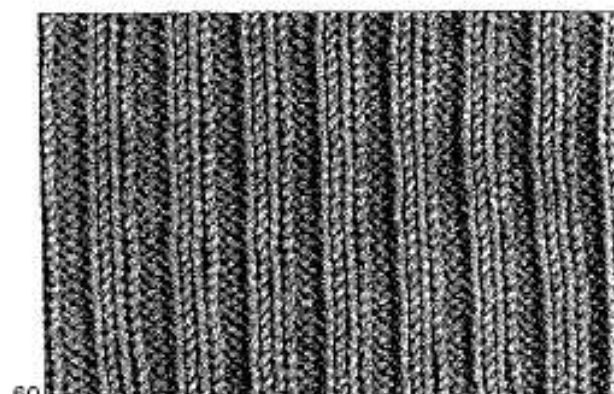

60

## CASTING-ON FOR 2 × 2 RIB

### 1. Setting of carriage

Carriage (KH)

Change knob : NL

Tension dial : 0

Holding cam lever : N

Pattern selector button : PLAIN

Carriage (KR)


Slide lever : II

Tension dial : 0

Cam lever : (L) N, (R) N

Tucking lever : R

Holding cam lever : (L) N, (R) N

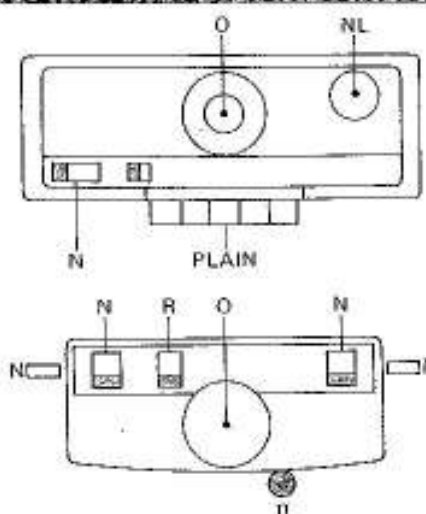

61

### 2. Needle arrangement

- Set the half pitch lever on "P", and racking indicator on No 5.
- By using 2/2 needle pusher, arrange the plain needles and purl needles in position B of each bed. (see Fig. 63.)

Note : Both end needles must be plain needles.

- Set the half pitch lever on "H".
- Set the racking indicator on No 4. (see Fig. 64.)



62




61



63



64



65



- e. Raise a purl needle in the left side to position B.
- f. Move the connected carriage a few times over all arranged needles to set them in a line.  
Then, place the carriage at right end of the bed.


66



### 3. First row knitting

- a. Thread the yarn into the yarn feeder.
- b. Move the connected carriage from right to left. (The yarn will hang on plain and purl needles.)


67

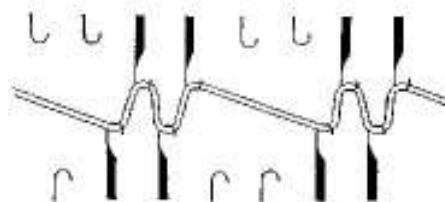

### 4. Hang on the cast-on comb

- \* This is in the same way as 1 x 1 rib.
- a. Hold the cast-on comb with the face having the protrusions facing you and the comb on top.
- b. Put the cast-on comb between the knitter and the ribber from underneath and insert the comb between the yarn hanging on the needles. And pass the wire.
- c. Hook the loose end of the yarn around the yarn clip.

68

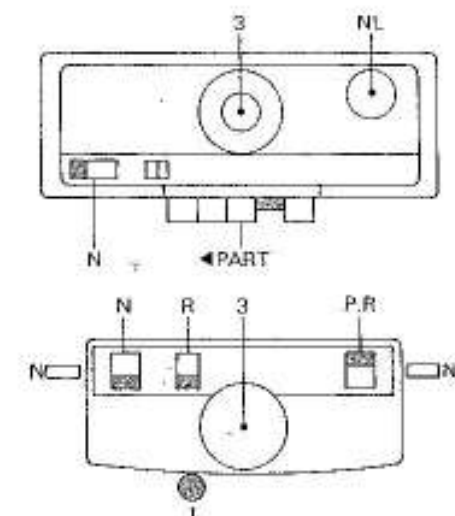


### 5. Hang on the weights

Hang the weights as per Standard weights chart on page 13 on the cast-on comb to keep balance.


### 6. Perfect selvage

- a. Set the carriages as shown in the Fig. 69.
- b. Move the connected carriage from left to right.  
(Only the plain needles knit.)
- c. Move the connected carriage from right to left.  
(The purl needles knit.)
- d. Move the connected carriage from left to right.  
(The plain needles knit.)

69



70

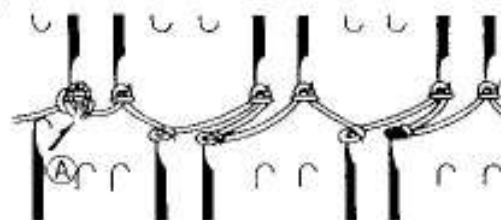

71


Return to position A

7. Needle arrangement to change from selvedge of the  $2 \times 2$  rib knitting.
- Set the half pitch lever to position "P".
  - Set the racking indicator on No 5.
  - By using the Double eyelet transfer needle, transfer the stitch of left end purl needle to the left end plain needle which has one stitch, and return the empty purl needle to position "A" of KR bed. (See Fig. 71.)

\* How to transfer—see on page 40.

## 2 × 2 RIB KNITTING

- \* After knitting the selvedge, set the carriages as shown in the Fig. 72. Then, continue the knitting.

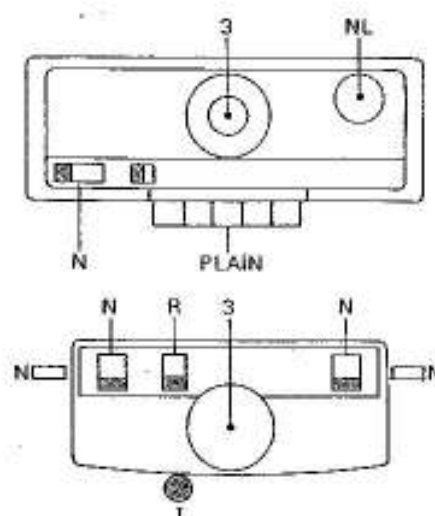

72

## DIFFERENT METHOD OF 2 × 2 RIB KNITTING

- Set the half pitch lever to "H", and arrange the needles as shown in the Fig. 74.
- Set the racking indicator on No 4. Raise the left end purl needle to position B of KR bed.
- From the step "first row knitting" to "selvedge" are the same as original method. After selvedge, set the racking indicator on No 5.
- Transfer the left end purl stitch to the plain needle, and return the empty needle to A position of KR bed.
- The knitting is the same as original method.



73




74

# How to knit full needle rib

22

Knitting method of full needle rib is the same as for 1×1 rib. Difference is the needle arrangement only. In 1×1 rib, every other needles are used but in full needle rib, all needles are used. Fine wool (ex. 2ply) is suitable for this rib knitting.

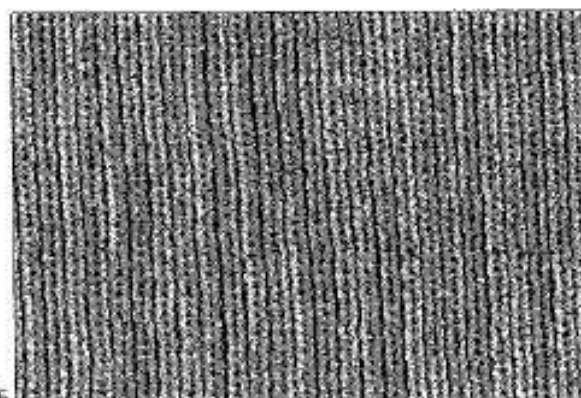

75

## CASTING-ON FOR FULL NEEDLE RIB

### 1. Setting of carriage

Carriage (KH)

Change knob : NL

Tension dial : 0

Holding cam lever : N

Pattern selector button : PLAIN

Carriage (KR)


Slide lever : II

Tension dial : 0

Cam lever : (L) N, (R) N

Tucking lever : R

Holding cam lever : (L) N, (R) N

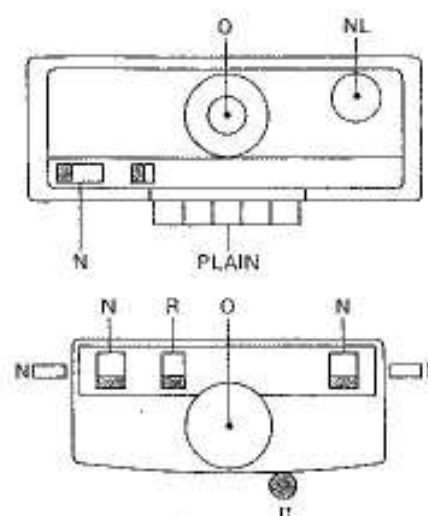

76

### 2. Needle arrangement

- Set the half pitch lever to "H".



77



- b. Arrange the plain and purl needles in position B of each bed.

Note: Both end needles must be plain needles.

- c. Move the connected carriage a few times over all arranged needles to set them in a line. Then, place the carriage at right end of the bed.


78



### 3. First row knitting

- a. Thread the yarn into the yarn feeder.  
b. Move the connected carriage from right to left. (The yarn will hang on plain and purl needles.)

79

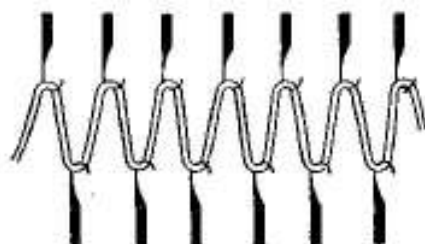

### 4. Hang on the cast-on comb

This is the same as 1 x 1 rib.


### 5. Hang on the weights

Hang the weights as per Standard weights chart on page 13 on the cast-on comb to keep balance.

### 6. Perfect selvage

- a. Set the carriages as shown in the Fig. 80.  
b. Move the connected carriage from left to right. (Only the plain needles knit.)  
c. Move the connected carriage from right to left. (The purl needles knit the stitches.)  
d. Move the connected carriage from left to right. (The plain needles knit.)


80

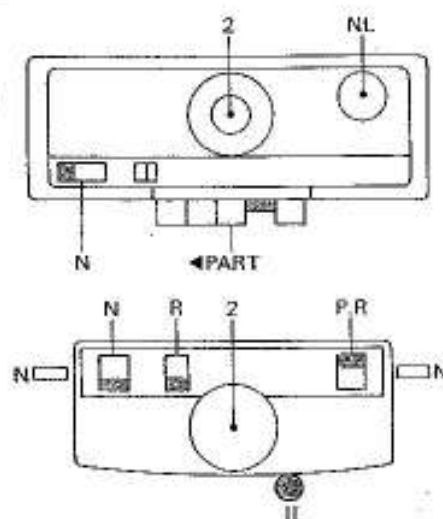

## FULL NEEDLE RIB KNITTING

- \* After knitting the selvage, set the carriages as shown in the Fig. 81. Then, continue the knitting.

81

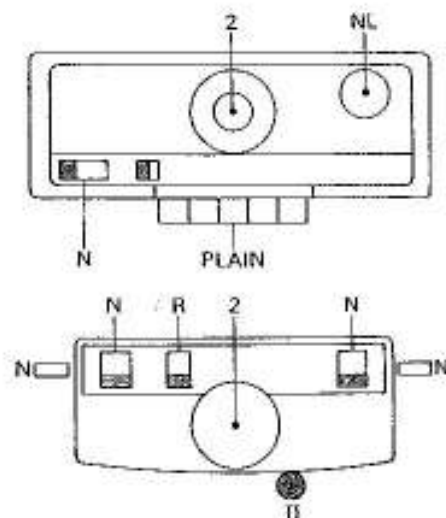


# How to knit 5 × 5 rib

24

5 × 5 rib is called 5 knit 5 purl rib. In one row, there are 5 knit stitches alternating with 5 purl stitches, and vertically, from knit stitch over knit stitch and purl stitch over purl stitch.

The following example is knitted with medium thickness wool.

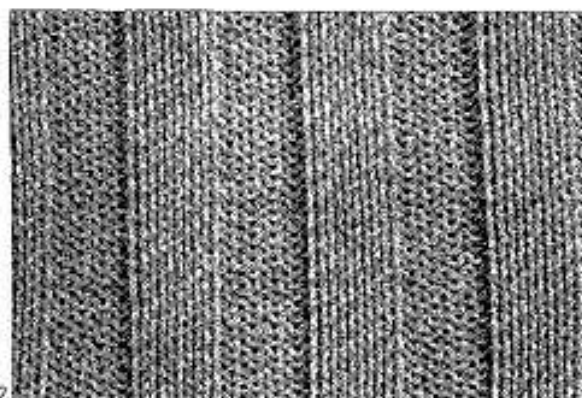

82

## CASTING-ON FOR 5 × 5 RIB

### 1. Setting of carriage

Carriage (KH)

Change knob : NL

Tension dial : O

Holding cam lever : N

Pattern selector button : PLAIN

Carriage (KR)


Slide lever : I

Tension dial : O

Cam lever : (L) N, (R) N

Tucking lever : R

Holding cam lever : (L) N, (R) N

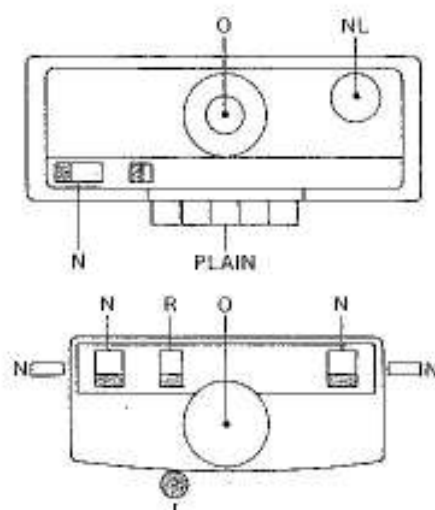


83

2. "Needle arrangement", "First row knitting", "Hang on the cast-on comb" and "Hang on the weights" are the same as full needle rib.

### 3. Perfect selvedge

- a. Set the carriages as shown in the Fig. 84.
- b. Move the connected carriage from right to left.  
(Only the plain needles knit.)
- c. Move the connected carriage from left to right.  
(The purl needles knit.)
- d. Move the connected carriage from right to left.  
(The plain needles knit.)

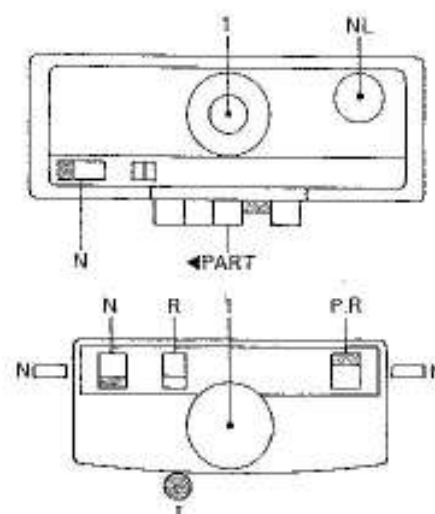



84

# How to knit circular knitting

25

## 5 × 5 RIB KNITTING

1. After knitting the selvedge, by using the Double eyelet transfer needle, transfer the stitches to corresponded needles, and return the empty needles to position A of each bed. (see Fig. 85.)
2. Set the carriages as shown in the Fig. 86. Then, continue the knitting.

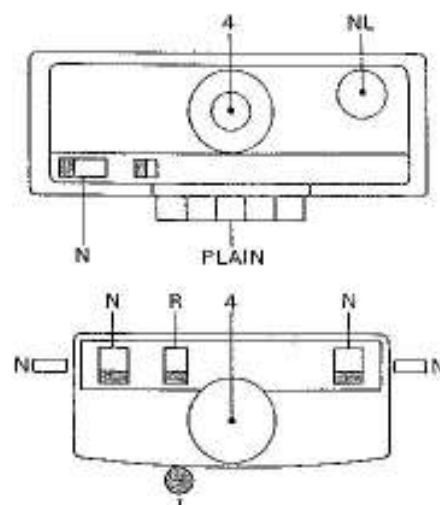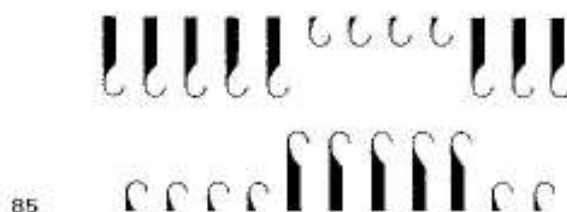

## How to knit circular knitting.

Circular knitting is made up of only plain knit stitches, and is a jointless tube. Size of tube depends on the number of needles. Before you start to knit the garment, make the test piece to check the tension gauge. If there is slacken on the side, please adjust by the tension dial on the KR carriage. The example is knitted with medium thickness wool.



## CASTING-ON FOR CIRCULAR KNITTING


### 1. Setting of carriage

Carriage (KH)

Change knob : NL  
Tension dial : 6  
Holding cam lever : N  
Pattern selector button : PLAIN

Carriage (KR)

Slide lever : I  
Tension dial : 6  
Cam lever : (L) N, (R) N  
Tucking lever : R  
Holding cam lever : (L) N, (R) N

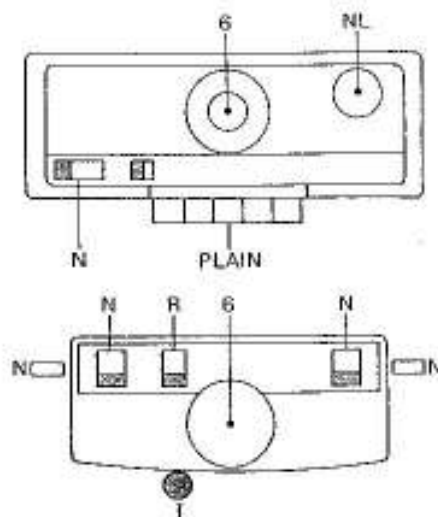

88

## 2. Needle arrangement

- Set the half pitch lever to "H".
- Arrange the plain and purl needles in position B of each bed. (see Fig. 90.)


Note: The number of needles between plain and purl needle must be same.

- Move the connected carriage a few times over all arranged needles to set them in a line. Then, place the carriage at right end of the bed.

89



90



## 3. First row knitting

- Thread the **Cast-on thread** provided in the accessories of KH into the yarn feeder.
- Move the connected carriage from right to left. (The cast-on thread will hang on plain and purl needles.)


## 4. Hang on the cast-on comb

\* This is the same way as 1 x 1 rib.

## 5. Hang on the weights

Hang the weights as per Standard weights chart on page 13 on the cast-on comb to keep balance.

- Remove the cast-on thread from the yarn feeder, and rethread the knitting yarn into the feeder.

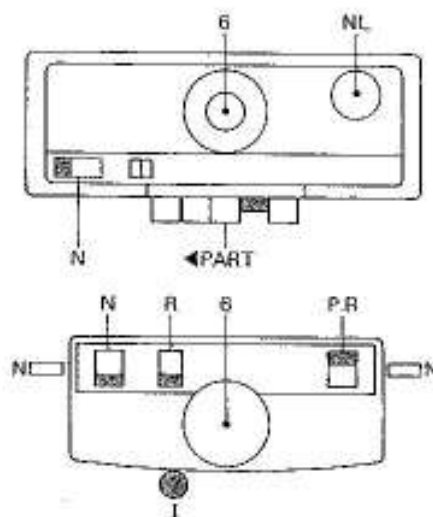

## CIRCULAR RIB KNITTING


- \* Set the carriages as shown in the Fig. 91. Then, continue the knitting.

91

# How to knit "U" style knitting

27

This garment is made of all plain knitting stitches. The knitter side and the ribber side are connected at only one side. This knitting is used for work of more than 200 stitches width. In the following, the garment is knitted with closed right side and open left side.

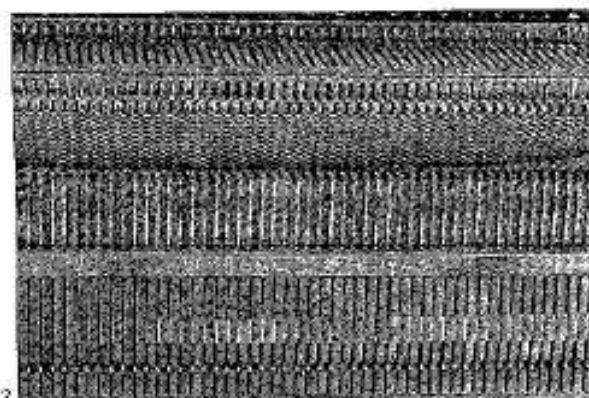


92

## CASTING-ON FOR "U" STYLE KNITTING

- \* This is the same as for circular knitting.  
The connected carriages is on the left side of the bed after casting-on.


## "U" STYLE KNITTING

1. Set the carriages as shown in the Fig. 93, and knit 2 rows.

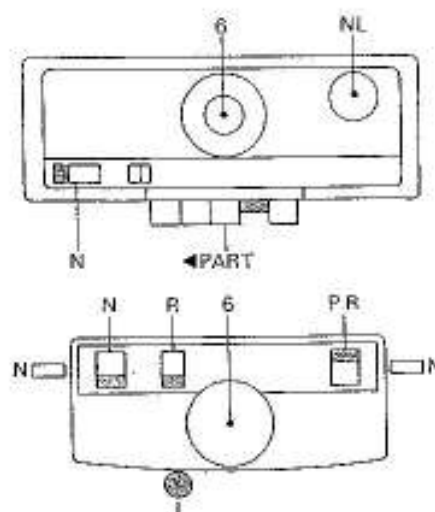

93

2. Then, reset the carriages as shown in the Fig. 94, and knit 2 rows.

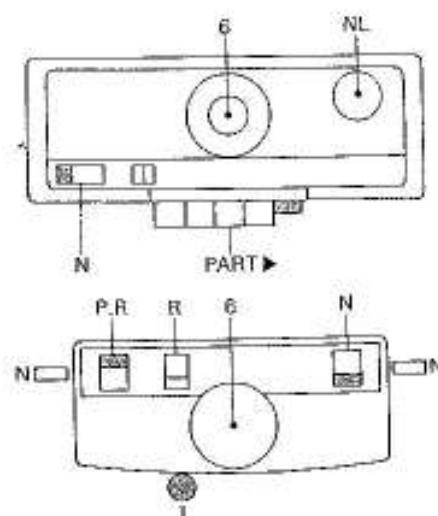

94

3. Repeat step (1) to (2), then you can make "U" style knitting.




# How to knit English rib

28

English rib is a variety of  $1 \times 1$  rib, and knitter side is plain stitch but ribber side is tuck stitch.

The example is knitted with medium thickness wool.

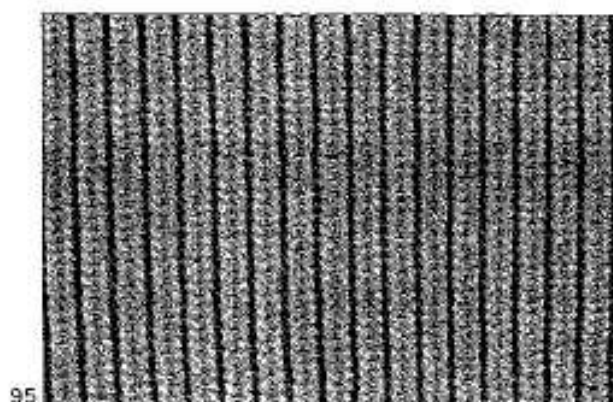

## CASTING-ON FOR ENGLISH RIB


\* This is the same as for  $1 \times 1$  rib.

## ENGLISH RIB KNITTING

\* Set the carriages as shown in the Fig. 96, and continue the knitting.

Note: Hang the Wire-loop type weight hanger and small weight on the edge of the knitting work to avoid stitch dropping.

How to use .....see on page 14.

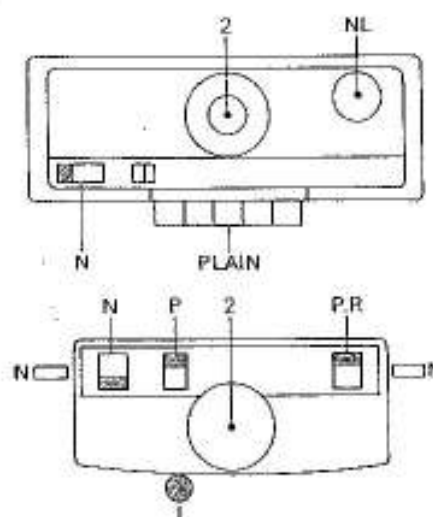


# How to knit fisherman's rib

29

Fisherman's rib is made of tucking stitches on both sides of garment.

The example is knitted with medium thickness wool.

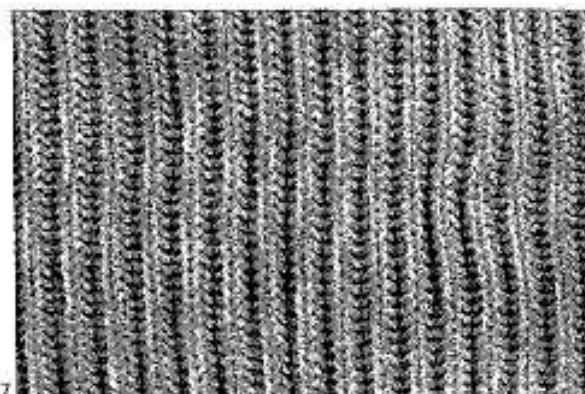


97

## CASTING-ON FOR FISHERMAN'S RIB

\* This is the same as for 1×1 rib.

## FISHERMAN'S RIB KNITTING

\* Set the carriages as shown in the Fig. 98, and continue the knitting.

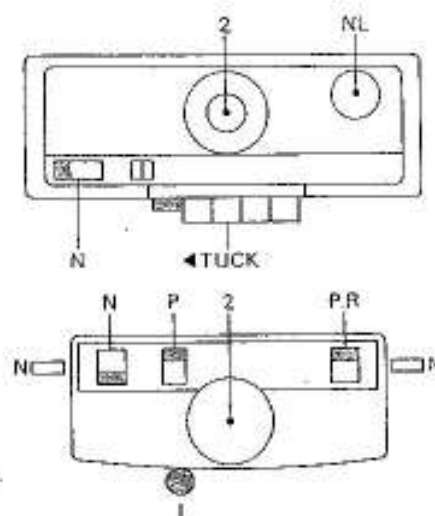


98

# How to knit tucking pattern

30

Tucking pattern is a variation of  $1 \times 1$  rib or full needle rib. In the following description, tucking pattern of full needle rib is made. The example is knitted with fine wool (Ex. 2ply).

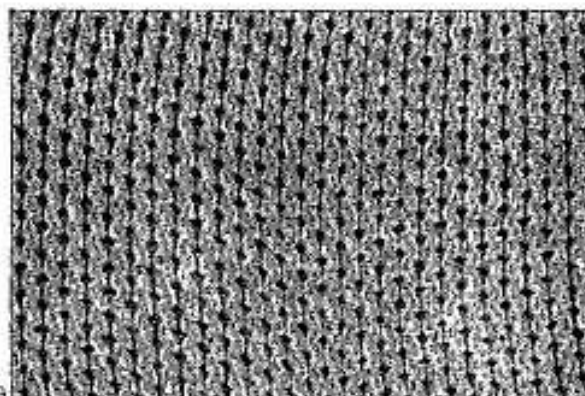


Card No. 2D (KH-830)  
Card No. 2 (KH-820)

## CASTING-ON FOR TUCKING PATTERN

\*This is the same as for full needle rib.

## TUCKING PATTERN KNITTING.


1. Take the No. 2D punch card provided in the KH punch cards, and set it to the knitting machine.
2. After knitting the selvage, move the connected carriage from right to left. (Remaining the carriage setting.)
3. Set the starting line of the punch card, and card lock lever to ●.
4. Set the change knob to "KC".
5. Move the connected carriage from left to right.  
(The plain needles knit, and corresponded needles to the punch card are brought to position D of KH bed.)
6. Set the card lock lever to ▼.
7. Set the carriages as shown in the Fig. 100.
8. Continue the knitting.

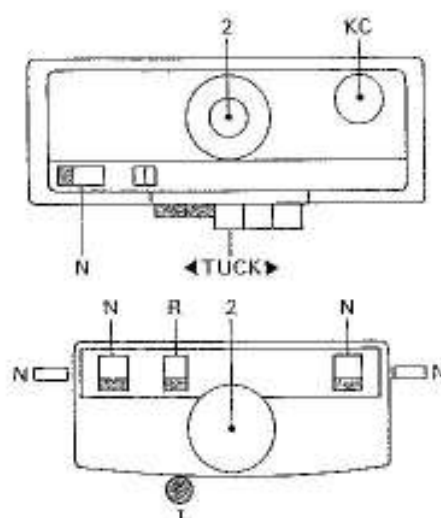

Note: If the end needles of KH bed is not brought by the carriage, bring to position D by hand.

\* Here are a few more examples of tucking pattern.


These patterns are knitted the same as No. 2D.

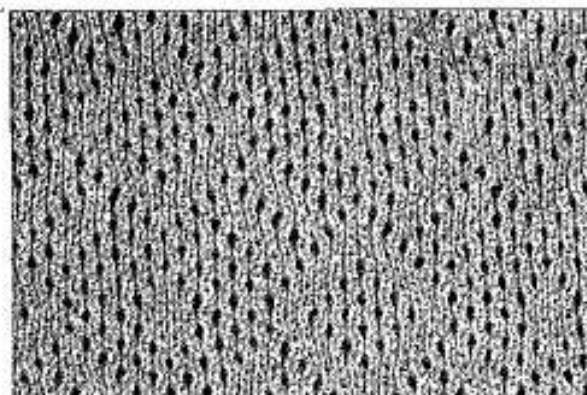

103

Card No. 7D (KH-830)


Card No. 10 (KH-820)

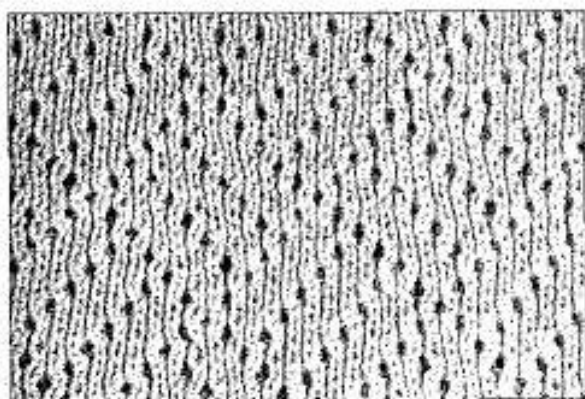

101


Card No. 5D (KH-830)

Card No. 8 (KH-820)

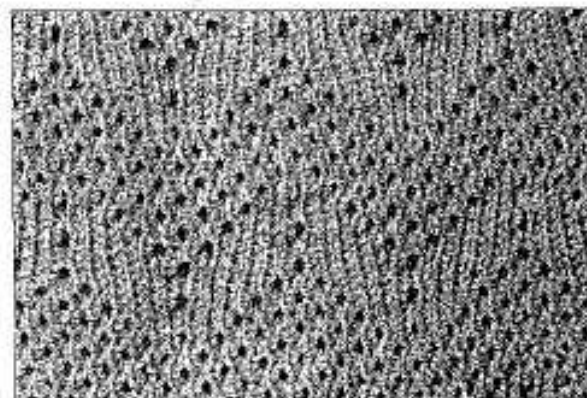


104

Card No. 8D (KH-830)

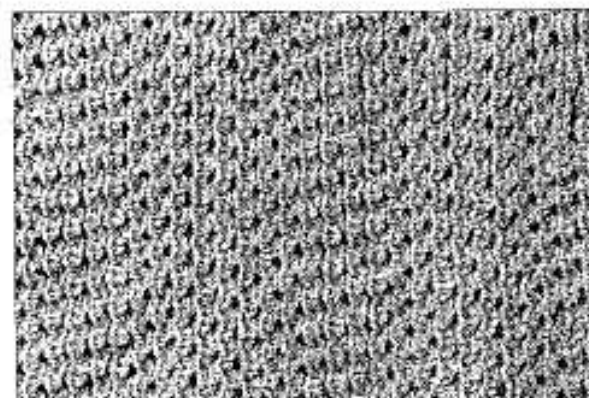

102

Card No. 6D (KH-830)

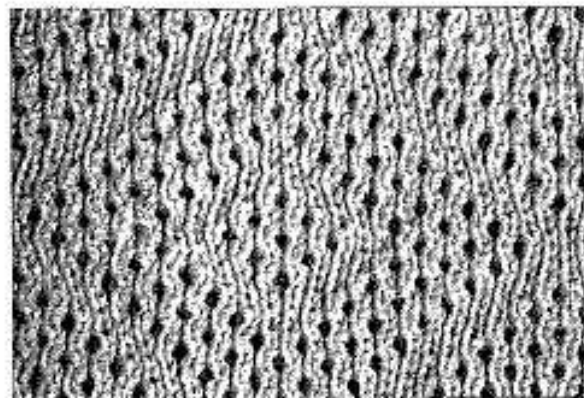

105


Card No. 9D (KH-830)

Card No. 14 (KH-820)

# How to knit racking pattern of English rib

32


The example is knitted with medium thickness wool.

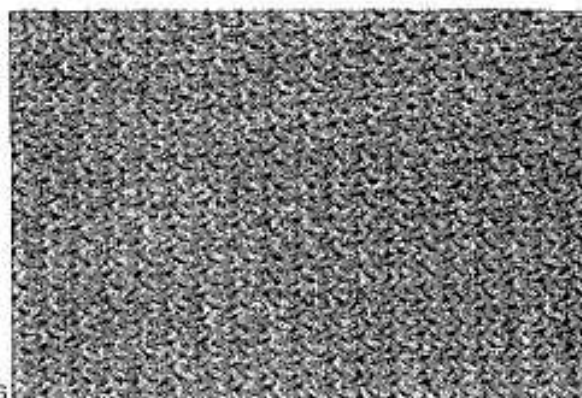

106

## CASTING-ON FOR RACKING PATTERN OF ENGLISH RIB


1. Set the racking indicator on No. 5, and cursors on the indicator to No. 4 and No. 5.
2. The other steps are the same as for 1×1 rib.
3. After knitting the selvedge, set the half pitch lever on "H".



107

## RACKING PATTERN KNITTING

1. Set the carriage as shown in the Fig. 108.
2. Move the connected carriage from right to left. (The plain needles knit and purl needles have two loops each on their hooks.)
3. Set the racking indicator on No. 4.
4. Knit two rows.
5. Set the racking indicator on No. 5.
6. Move the connected carriage from left to right. (One row)
7. repeat step (2) to (6).

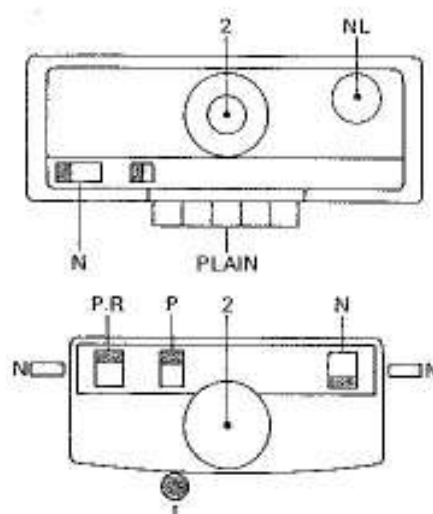

108



# How to knit racking pattern (I)

33

The example is knitted with medium thickness wool.







## CASTING-ON FOR RACKING PATTERN (I)

- \* Set the racking indicator on No. 0.  
The other steps are the same as for full needle rib.

## RACKING PATTERN (I) KNITTING

1. After knitting the selvedge, using the Double eyelet transfer needle, transfer the part (A) stitches to opposite plain needles, and return the empty needles to position A of KR bed.  
How to use ----- see on page 40.
2. Set the carriages as shown in the Fig. 111.
3. Move the connected carriage from right to left. (The plain and purl needles knit.)
4. Set the racking indicator on No. 1.
5. Move the connected carriage from left to right.
6. Set the racking indicator on No. 2.
7. Continue the same manner until the racking indicator indicates No. 10.
8. Move the connected carriage from right to left.
9. Set the racking indicator on No. 9.
10. Continue the same manner until the racking indicator indicates No. 0.
11. The pattern knitted from step (3) to (10) is one cycle.

Note: Don't turn the racking grip handle when the needles are raised over the gate pegs.

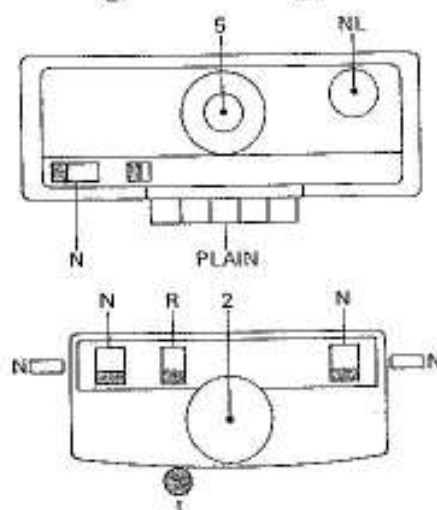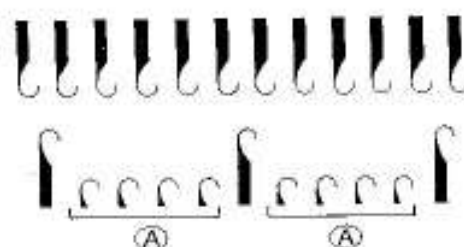


114

# How to knit racking pattern (II)


34

The example is knitted with fine (ex. 2ply) wool.

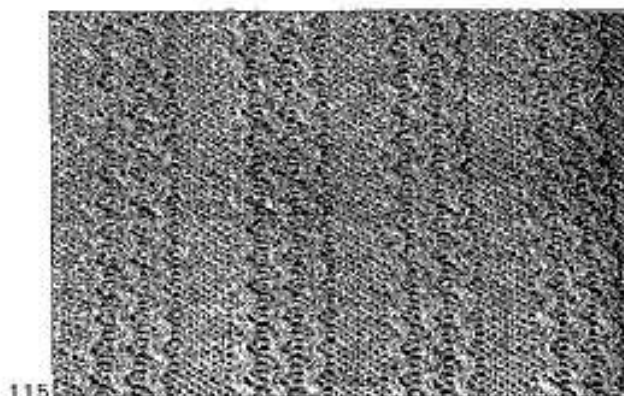

## CASTING-ON FOR RACKING PATTERN (II)

\* This is the same as for full needle rib, and set the cursors to No. 5. and No. 7.




## RACKING PATTERN (II) KNITTING

1. After knitting the selvedge, using the Double eyelet transfer needle, transfer the part (A) stitches to opposite plain needles, and return the empty needles to position A of KR bed.



2. Set the carriages as shown in the Fig. 118.
3. Move the connected carriage from right to left.
4. Move the connected carriage from left to right.
5. Set the racking indicator on No. 7.
6. Move the connected carriage from right to left.
7. Move the connected carriage from left to right.
8. Set the racking indicator on No. 5.
9. Repeat the step (3) to (8).

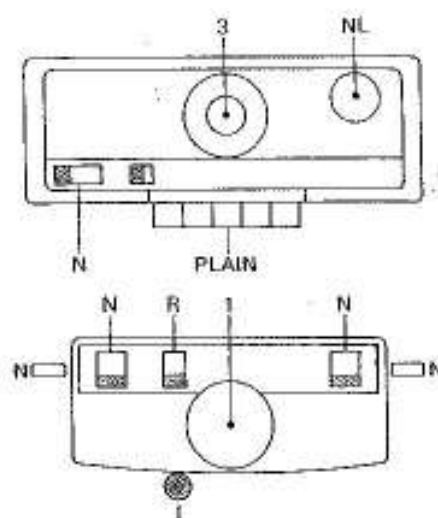

# Increasing the stitches


35

1. Increasing one stitch on one side of knitting width.

## SIMPLE METHOD

- a. Place the carriage on the side which you want to increase.
- b. Raise the end needle to the working position B. (see Fig. 119.)
- c. The empty needle will pick up the yarn as it knits the next row.


119

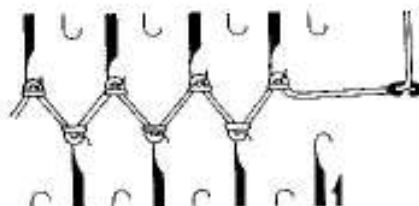

## FULL FASHIONED METHOD

- a. Use the transfer tool, move the first stitch (1) onto the adjacent empty needle (2).  
Now second needle from the end becomes empty.
- b. Pick up either neighbouring lower loop (3), and hook on the empty needle (1).

120

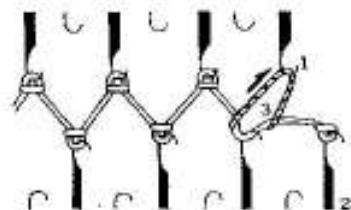

2. Increasing more than two stitches on either side of the garment.

- a. Place the carriage opposite to the side you want to increase.
- b. bring into action on the side opposite to the carriage as many needles as the number of stitches to be increased.
- c. Move the carriage.
- d. The yarn will hang on the increased needles on both sides.
- e. Hang the weight hanger for side tension and small weight on the yarn which is shaping zigzag line.
- f. Continue the knitting.

# Decreasing the stitches


36

1. Decreasing one stitch on either end.

## SIMPLE METHOD

- \* By using the single transfer tool, transfer the end stitch to the second needle, and take the empty needle out of action.


121



## SECOND METHOD

- a. Use two-needles transfer tool.  
Transfer the end stitch to the second needle and the second needle to the third needle.
- b. Take the empty needle out of action.


122

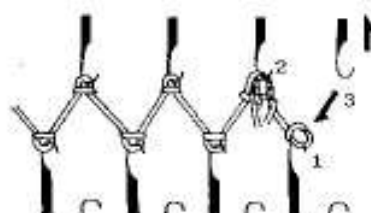

2. Decreasing more than two stitches.

- a. Place the carriage opposite to the side you want to decrease.
- b. Use the tapestry needle.  
Transfer the stitches which you want to decrease to the stem of the tapestry needle and pass through loops of stitches to be decreased.
- c. Take the empty needles out of action.

123

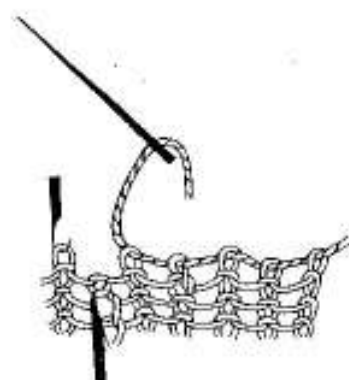

# Partial knitting of ribbing

37

Partial knitting is used for shaping of garment, making darts, shaping of a heel, vertical and horizontal buttonholes, neck opening, pockets etc. There are two cases, one is decreasing of knitting part, another one is increasing of knitting part.


## PARTIAL KNITTING OF 1 × 1 RIB

\* The example is partial knitting of 1 × 1 rib, however, 2 × 2 rib, full needle rib, 5 × 5 rib, English rib, Fisherman's rib and Tucking pattern rib are the same manner as 1 × 1 rib.

### 1. Decreasing knitting part.


- Set the both carriages as shown in the Fig. 125.
- Bring the nonknitting needles of KH and KR beds to position E.
- Move the connected carriage from right to left. (The needles on position B knit, and the yarn is across on the needles on position E.)
- To avoid a hole in the knitting, hook the yarn laying across on the needles on position E to the next needle of KR to the knitting. (see Fig. 126.)
- Move the connected carriage from left to right.
- Repeat step (b) to (e) according to the shape of the garment.

\* After partial knitting, if you want to knit all needles, simply set H.C.L.s. of both carriages to normal position. And move the carriage.

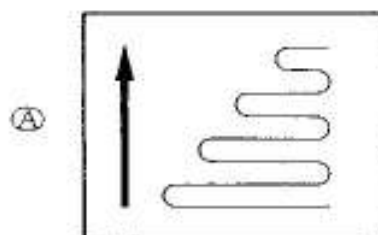

Decreasing knitting part

124

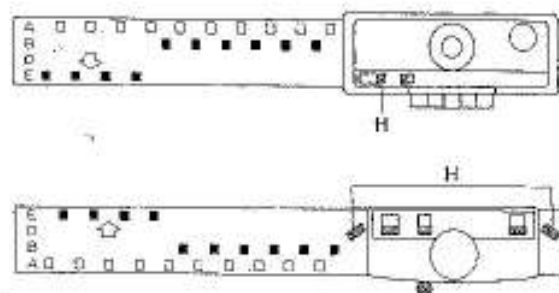

125



126



## 2. Increasing knitting part

- a. Set the both carriages as shown in the Fig. 128.

- \* For 1 × 1 rib, 2 × 2 rib and full needle rib, bring back the required needles you want to knit to position D of each bed. (see Fig. 128.)
- \* For English rib, Fisherman's rib and Tucking pattern rib, bring back the required needles you want to knit to position D, and using the transfer tool, place the stitch behind the latch into the hook. Then, return these needles to position B. (see Fig. 129.)


- b. Move the connected carriage from right to left.

(The needles on position B and D knit, and the yarn is across on the needles on position E.)


- c. To avoid a hole in the knitting, hook the yarn laying across on the needles on position E to the next needle to the knitting.

- d. Move the connected carriage from left to right.

- e. Repeat step (a) to (d) according to the shape of garment.

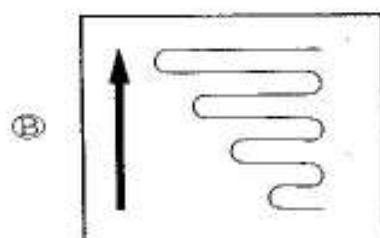


Increasing knitting part

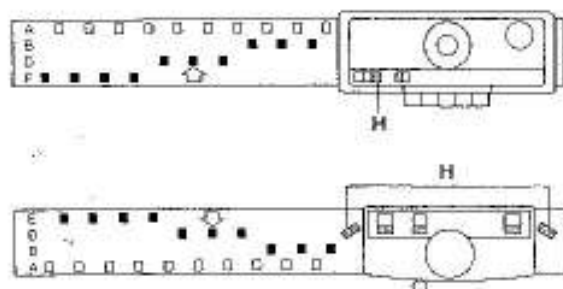

128

Return the stitch into the hook

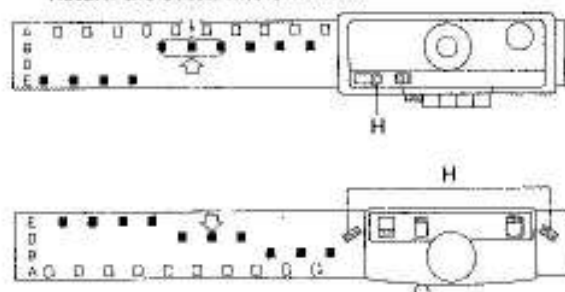

129


## PARTIAL KNITTING OF RACKING PATTERN

- \* In the racking pattern, it is impossible to bring both needles to position E, so, please knit partial knitting of racking pattern according to the following method.

The example is racking pattern of English rib.


### 1. Decreasing knitting part.

- a. Set the carriages as shown in the Fig. 130.
- b. Bring the nonknitting needles of KR bed to position E.
- c. Bring the knitting needles of KH bed to position E.

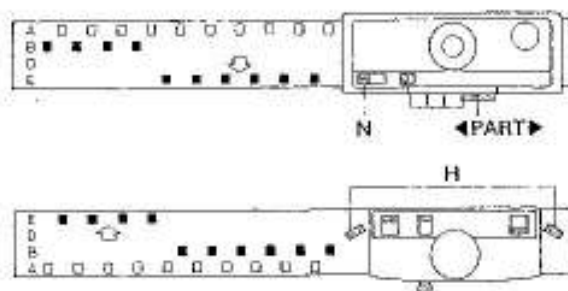

130

- d. Move the connected carriage from right to left. (The plain needles on Position E and purl needles on position B knit, and the yarn is across on the purl needles on position E.)
- e. To avoid a hole in the knitting, hook the yarn laying across on the purl needles on position E to the next needle to the knitting.
- f. Set the racking indicator on next number.
- g. Bring the knitting needles of KH bed to position E.
- h. Move the connected carriage from left to right.
- i. Repeat step (b) to (e).
- j. Set the racking indicator on next number.
- k. Bring the knitting needles of KH bed to position E.
- l. Move the connected carriage from left to right.
- m. Repeat step (b) to (l) according to the shape of garment.

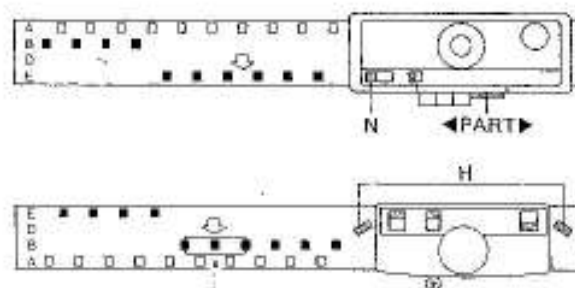

131

## 2. Increasing knitting part.

- a. Set the carriages as shown in the Fig. 131.
  - b. Bring back the required needles you want to knit to position D, and using the transfer tool, place the stitch behind the latch into the hook. Then, return these needles to position B.
  - c. Bring the knitting needles of KH bed to position E.
  - d. Move the connected carriage from right to left. (The plain needles on position E and purl needles on position B knit, and the yarn is across on the purl needles on position E.)
  - e. To avoid a hole in the knitting, hook the yarn laying across on the purl needles on position E to the next needle to the knitting.
  - f. Set the racking indicator on next number.
- (Continued on page 40.)

# How to transfer the stitch from the purl needle to plain needle or from plain needle to purl needle.


40

- g. Bring the knitting needles of KH bed to position E.
- h. Move the connected carriage from left to right.
- i. Repeat step (b) to (e).
- j. Set the racking indicator on next number.
- k. Bring the knitting needles of KH bed to position E.
- l. Move the connected carriage from left to right.
- m. Repeat step (b) to (l) according to the shape of garment.


## HOW TO TRANSFER THE STITCHES

- 1. How to transfer from purl needle to plain needle.
  - a. Raise the plain needle from position A to B, and open the latch.
  - b. By using the transfer tool, transfer the stitch on the purl needle to the empty plain needle.

132

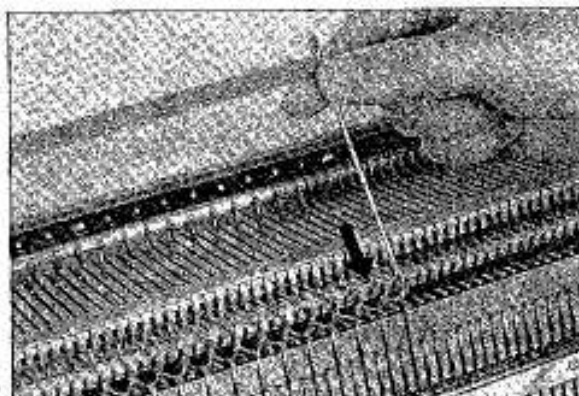

133

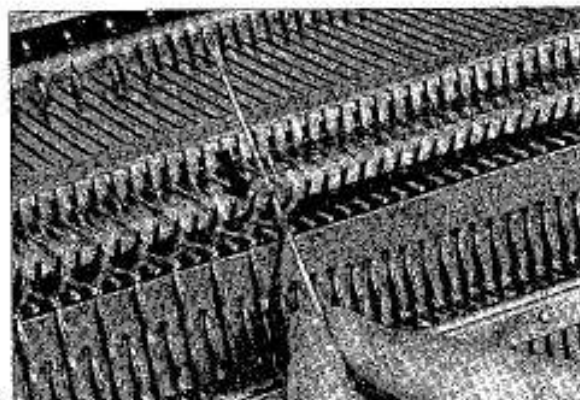

# Binding off and finishing edge of rib knitting


41

2. How to transfer from plain needle to purl needle.

- a. By using the transfer tool, transfer the stitch on every other plain needle to the corresponding purl needle.



134

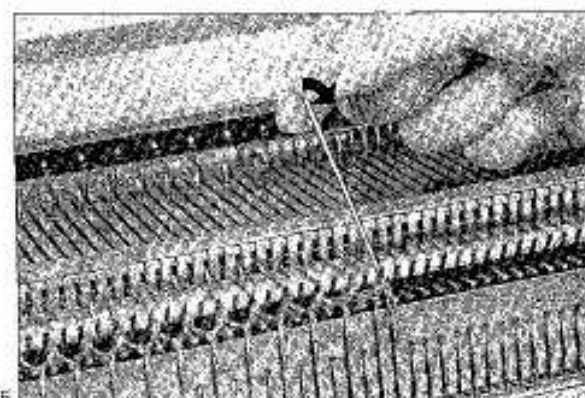


135

## BINDING

\* This method is used for binding up the stitches of the last row by using the yarn of rib knitting. Binding up is the same as selvedge.


When you finish rib knitting, knit one or three rows of circular knitting, then bind the last row by using the tapestry needle as shown in the figures.

The length of the yarn for binding is 3 times the width of knitting.




136

2 x 2 rib



137

2 x 1 rib



138

1 x 1 rib


# How to pick up dropped stitch

## Unravelling the rows


42

\* First, take off the weights and prevent dropping of multiple rows.


1. In case one stitch is dropped.
  - a. With the single transfer tool or work hook, pick up the stitch and the unknitted yarn and put them on the empty needle.
2. In case multiple rows are dropped.
  - a. Open the gate by pushing down both bracket levers, and catch the lowest loop of the dropped stitches with latch tool.
  - b. With the latch tool, make the stitches, and hang the final stitch on the empty needle.

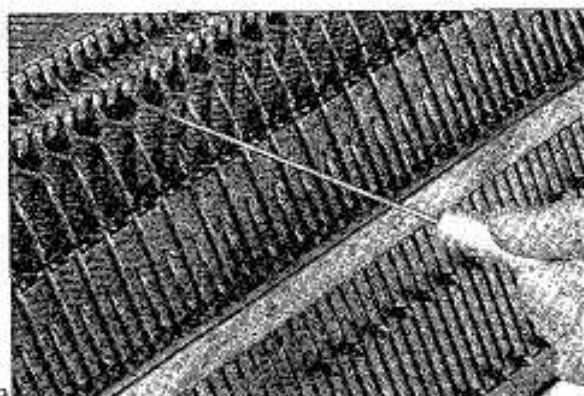

139

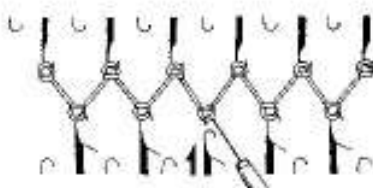

140

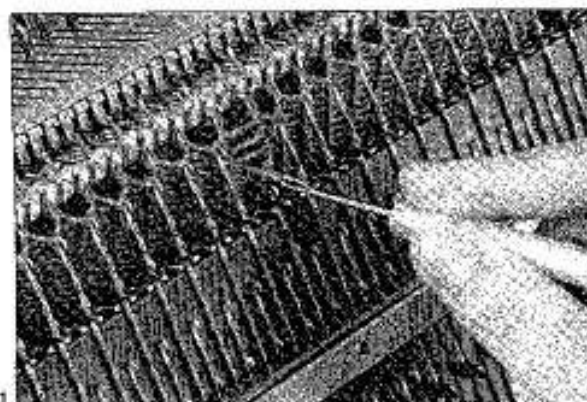


141

### Unravelling the rows

\* If you have knitted more than necessary, do not remove the work from the knitter and ribber. Simply unravel one or several rows by doing the following. Pull the yarn slightly, drawing it out of the stitches.

The stitches of the previous row will slip into the hook of the needles automatically as the yarn is raised in an upward movement towards the needle bed.

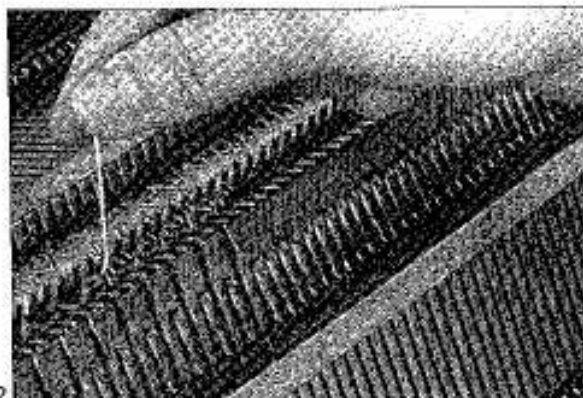

142



# If the carriage should jam.....

43


## 1. Disconnect the carriage

See on the page 12.

\* In case of the combination of KH-830/  
KR-830.

- Set the Change knob on KH carriage to "CR" position, and lift up the KH carriage.
- Place the KH carriage to the side from where the row commenced, then return the Change knob to the position which has set before jamming.

143

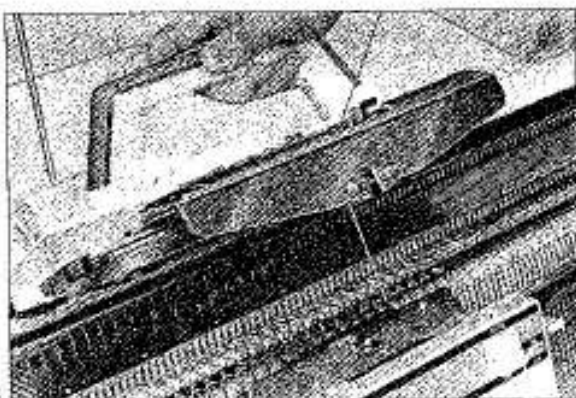

\* In case of the combination of KH-820/  
KR-830.

- Turn both Carriage release levers of KH carriage as far as they will go, and lift up the KH carriage.
- Place the KH carriage to the side from where the row commenced, and lock up both Carriage release levers.


## 2. Remove the front foot from the front rail of KR needle bed. And place the KR carriage at the same side of KH carriage. (Fig. 145)

## 3. Connect both carriages.


## 4. Work the corrections if required.

## 5. Continue the knitting.

144

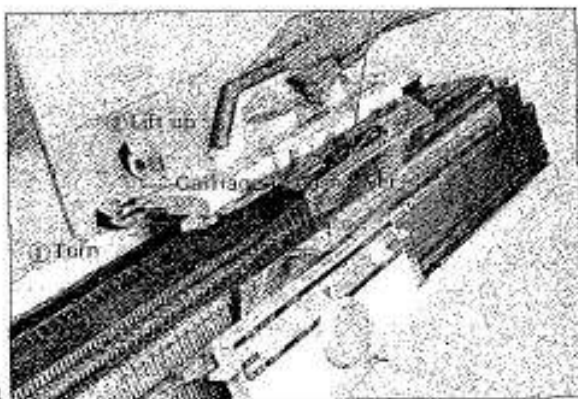

145

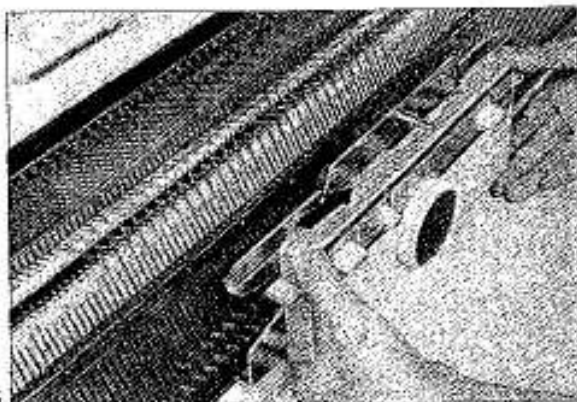




# How to use the knitter as a single bed with the ribber attached

## How to replace the purl needle

44


- Disconnect the carriage.
- Push down both bracket levers of the ribber and the ribber will come down one step.
- Take off the connecting arm from the KH carriage, and convert it to the sinker plate assembly of knitting machine.
- The knitter can be used as a single bed.

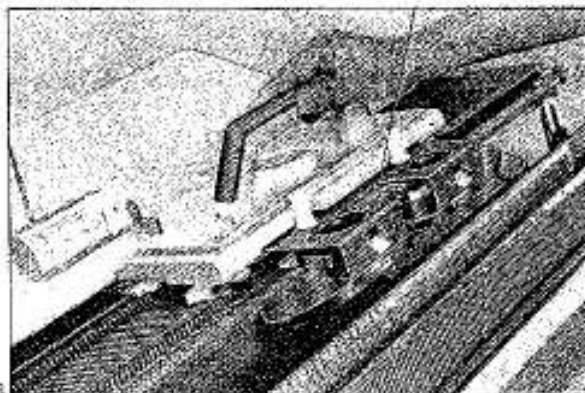


146

### How to replace the purl needle.

- Push the plastic bar from either side.
- Draw out by hand from another side of the ribber until the needle you wish to change is free.
- Bring forward the needle as far as it will go.
- Push down the hook of the needles until the shank of the needle rises free of the needle bed.
- Grasp the shank and draw it out backwards.
- Replace new needle with latch opened.
- Push in the bar, making sure that the flat face is down.

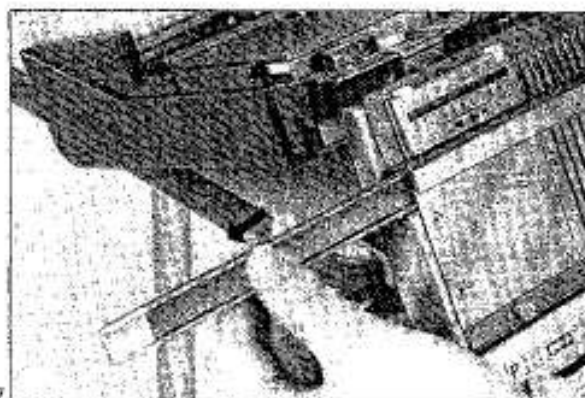


147

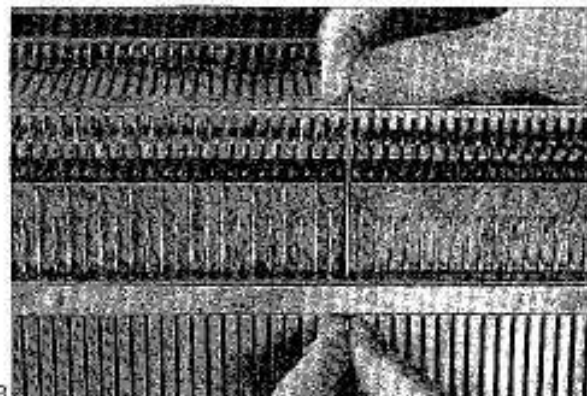


148

\* Each time you finish work, service your machine as follows :

- a. Clean the machine of all wool lint with hand brush.
- b. Polish each part with soft oil cloth.
- c. Oiling the following parts.
  - \* Back side of the carriage.
  - \* Rails of the needle bed.
  - \* Needle butts.
- d. Wipe off stained oil.
- e. Keep your machine in a dry place.

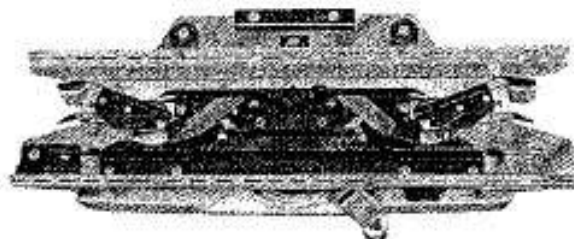


149

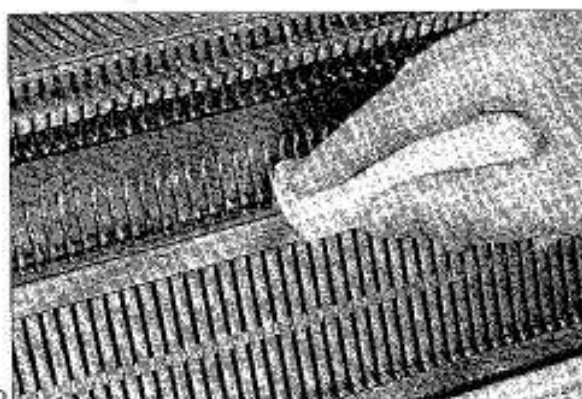


150

# Memo

46

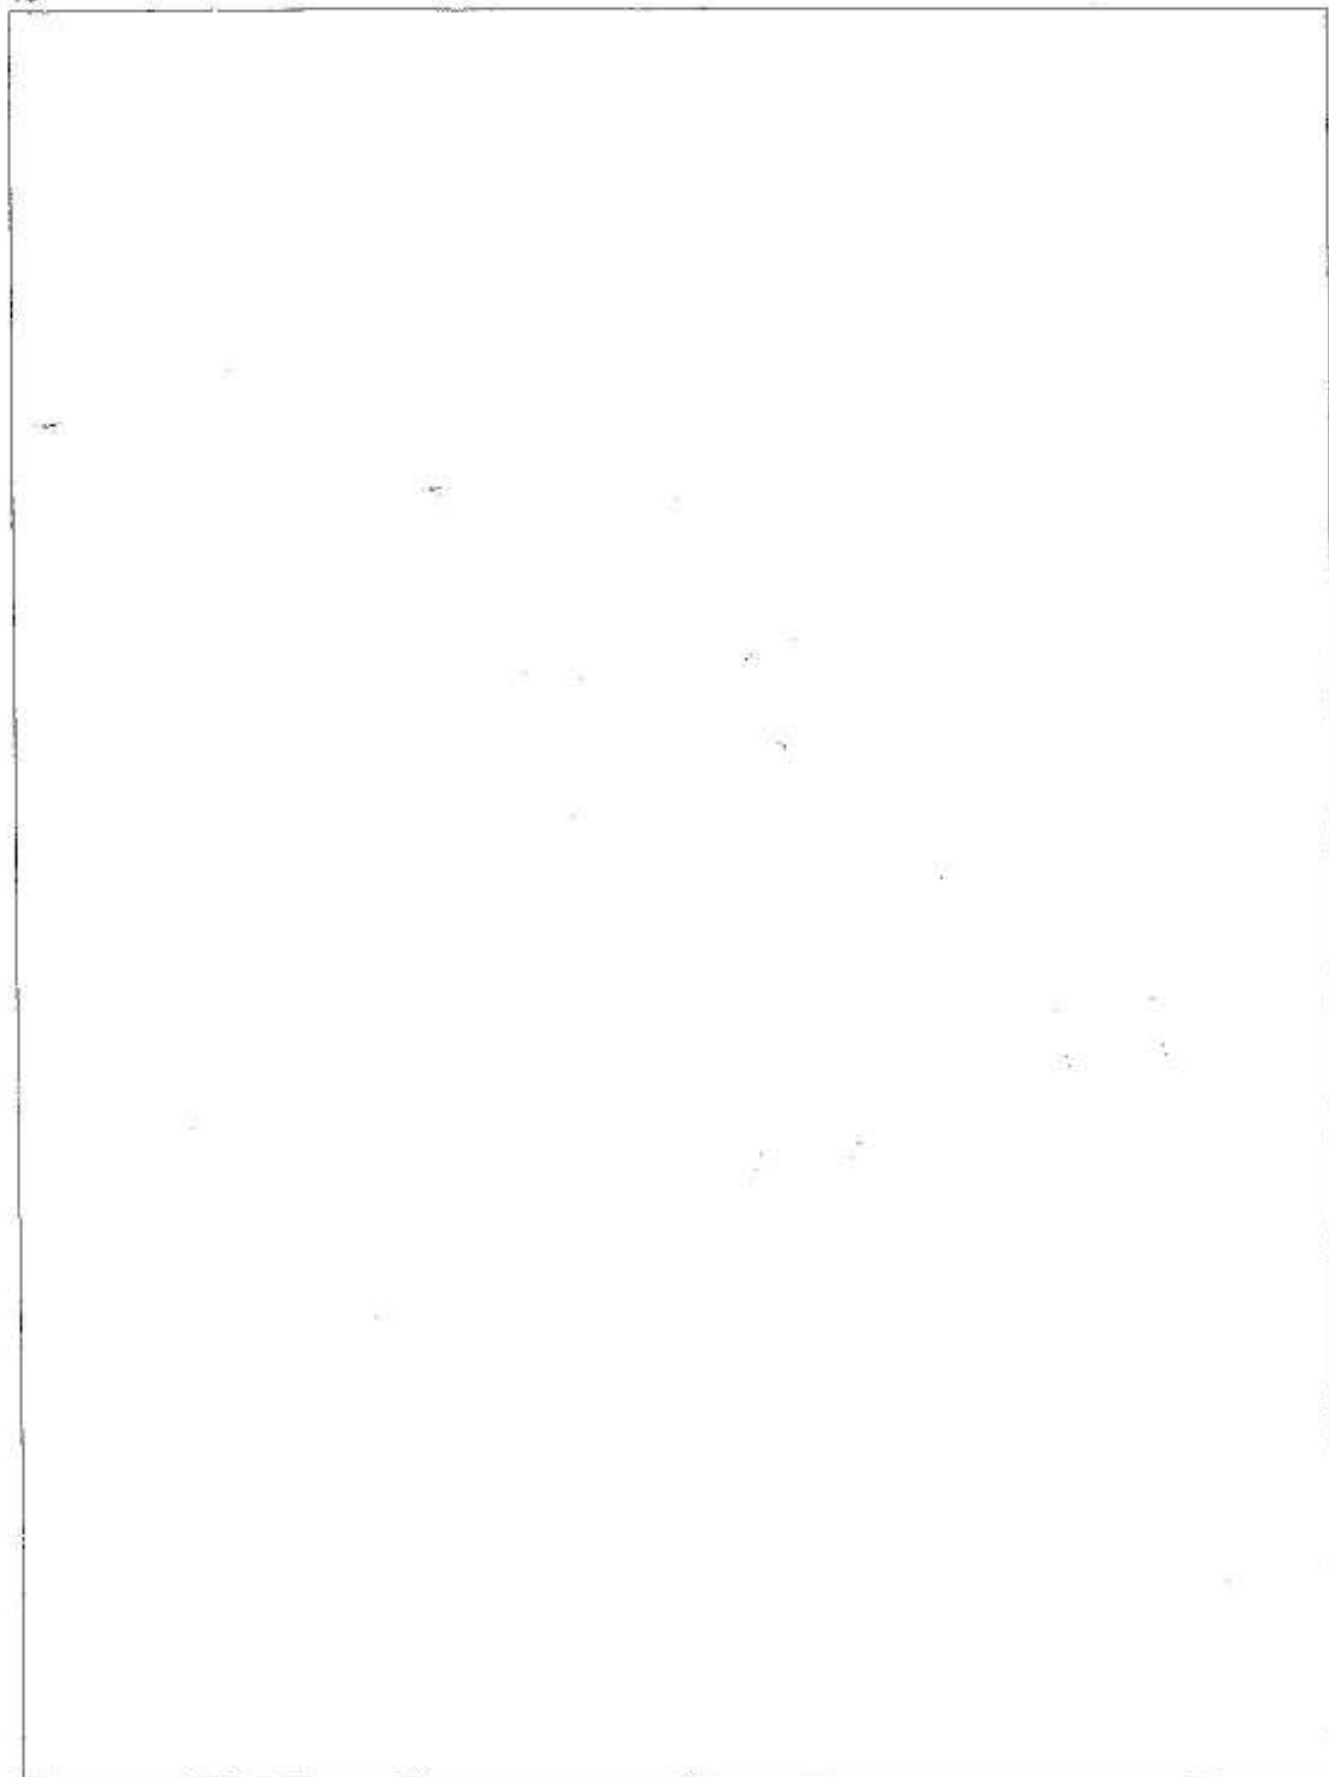

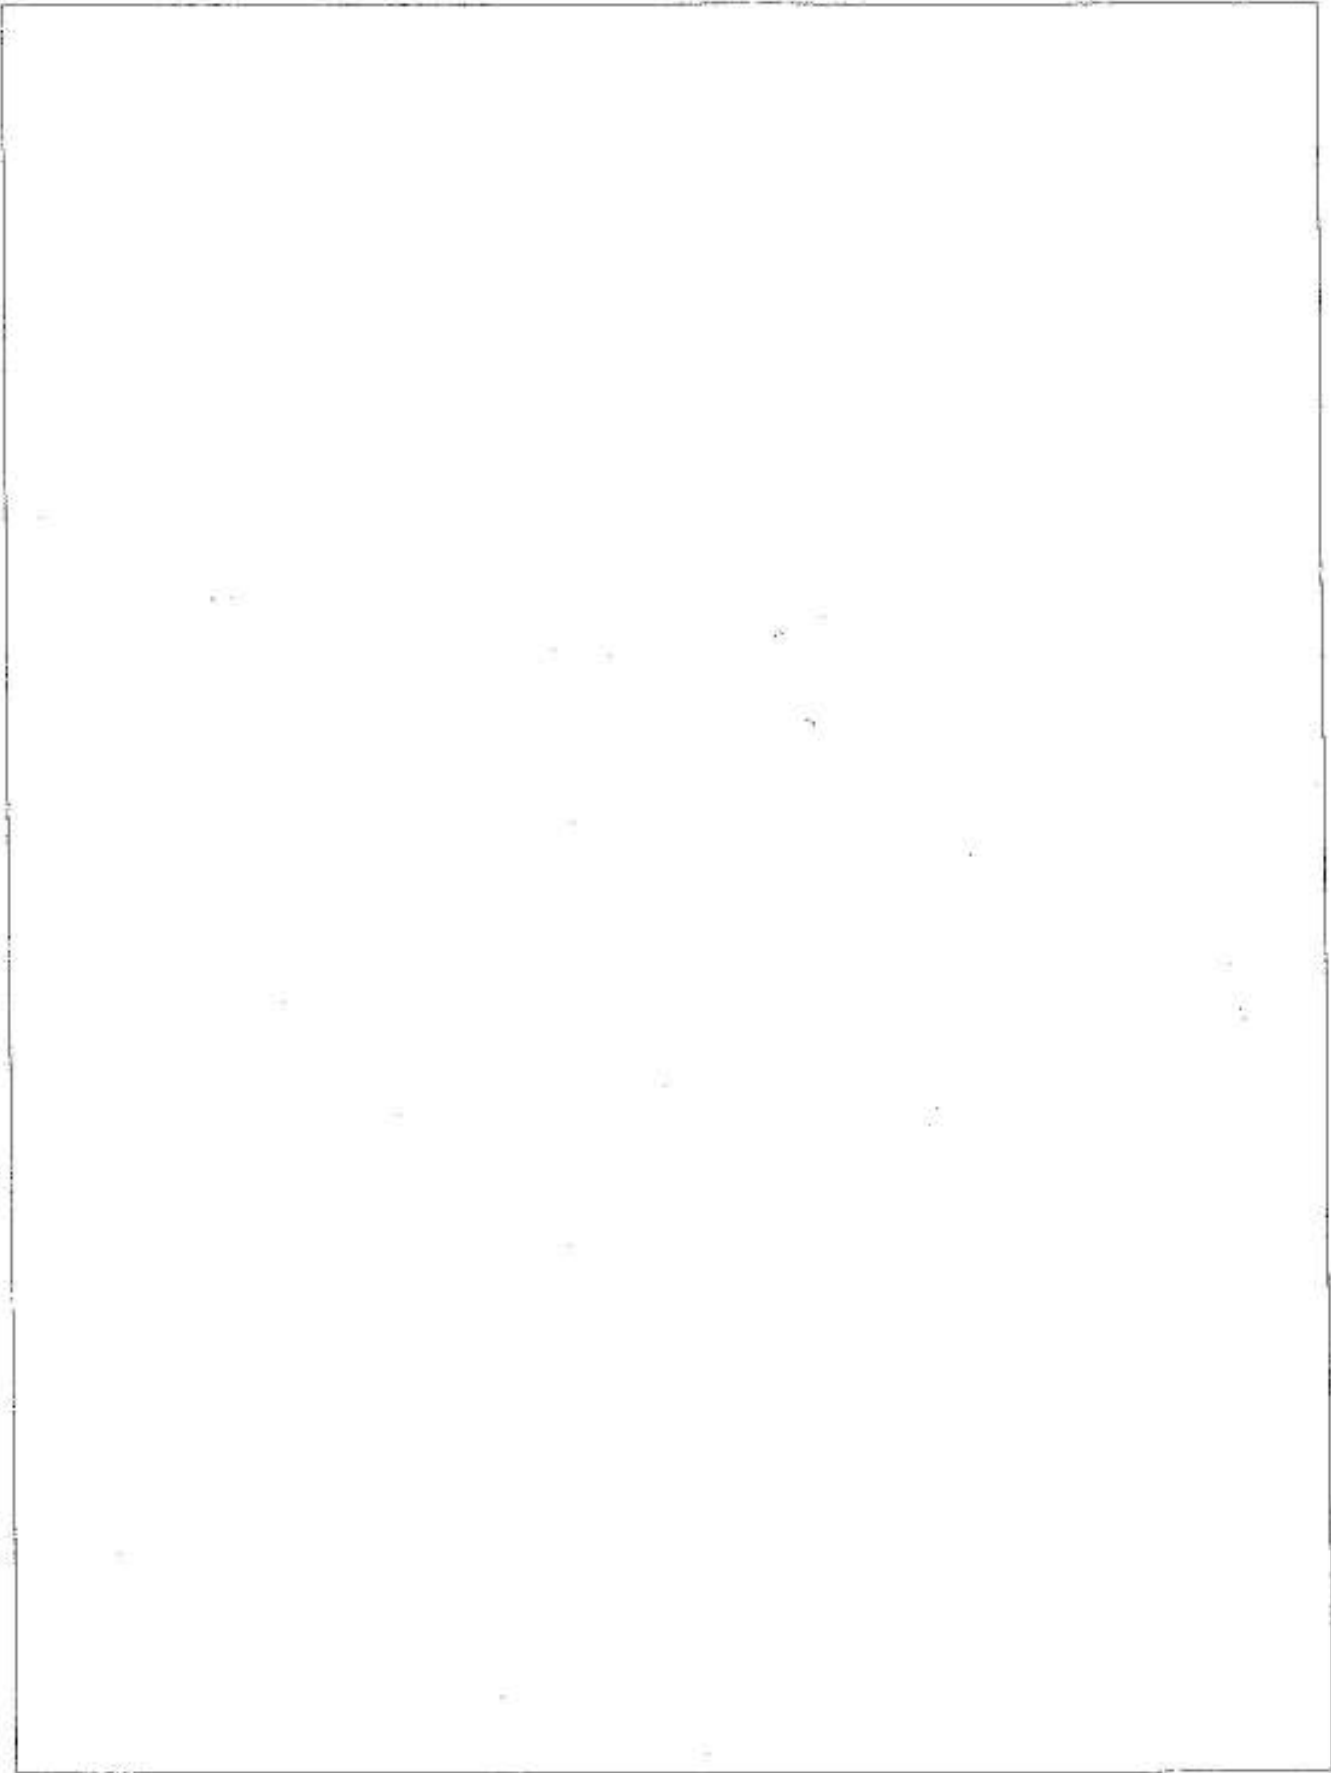

## I N D E X

Name of parts.....	1
Accessories.....	2
Setting up your ribber to the knitter.....	3
Joining the carriage.....	5
Important points to remember before you start knitting.....	8
Tension dial.....	8
Slide lever, Needle position, Half pitch lever.....	9
Racking grip handle, Bracket lever & Slight adjusting lever.....	10, 11
Disconnecting the carriage.....	12
How to use the accessories.....	13
How to knit 1 × 1 Rib.....	15
How to knit 2 × 2 Rib.....	19
How to knit Full needle Rib.....	22
How to knit 5 × 5 Rib.....	24
How to knit Circular knitting.....	25
How to knit "U" style knitting.....	27
How to knit English Rib.....	28
How to knit Fisherman's Rib.....	29
How to knit Tucking pattern.....	30
How to knit Racking pattern of English Rib.....	32
How to knit Racking pattern.....	33
Increasing the stitches.....	35
Decreasing the stitches.....	36
Partial knitting of ribbing.....	37
How to transfer the stitches.....	40
Binding off and finishing edge.....	41
How to pick up dropped stitch and unravelling the rows.....	42
If the carriage should jam.....	43
Using the knitter as a single bed with ribber attached.....	44
How to replace the puri needle.....	44
Maintenance.....	45